

(19)

Europäisches Patentamt
European Patent Office
Office européen des brevets



(11)

EP 1 043 577 A1

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:
11.10.2000 Bulletin 2000/41

(51) Int Cl. 7: G01L 17/00, G01L 9/12,
B60C 23/04

(21) Application number: 99302585.7

(22) Date of filing: 01.04.1999

(84) Designated Contracting States:
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE
Designated Extension States:
AL LT LV MK RO SI

(72) Inventor: Huang, Tien-Tsai
Pan-Chiao City, Taipei Hsien (TW)

(71) Applicant: Huang, Tien-Tsai
Pan-Chiao City, Taipei Hsien (TW)

(74) Representative: Stonehouse, Sidney William
Barker Brettell
138 Hagley Road
Edgbaston
Birmingham B16 9PW (GB)

(54) Tire pressure indicator including pressure gauges that have a self-generating power capability

(57) A tire pressure indicator comprises a set of pressure gauges (1) respectively installed in the tires of a vehicle, and receiver circuit means (5) installed in the vehicle adjacent to the tires. Each pressure gauge (1) includes a power supplying device (20), a pressure-sensing unit (30), and a transmitter circuit (40). The power-supplying device (20) has a self-generating voltage unit (21) forced by a piezoelectric element (210), a spring element (211), and a weight (212). The spring element (211) is vibrated when the tires of the vehicle are in motion, thereby causing the piezoelectric element (210) to generate power supply. The pressure-sensing unit (30) includes a capacitor means (300) formed by a motion member (31), a conductive member (33), and a converting circuit (34). The motion member (31) is made of electrically conductive material and is moved relative to the conductive member (33) subject to the air pressure of the respective tire, so as to change the capacity of the capacitor means, enabling the converting circuit (34) to output a first signal to the transmitter circuit (40) subject to RC oscillation waveform detected. The transmitter transmits a second signal into the air by radio upon receipt of the first signal.

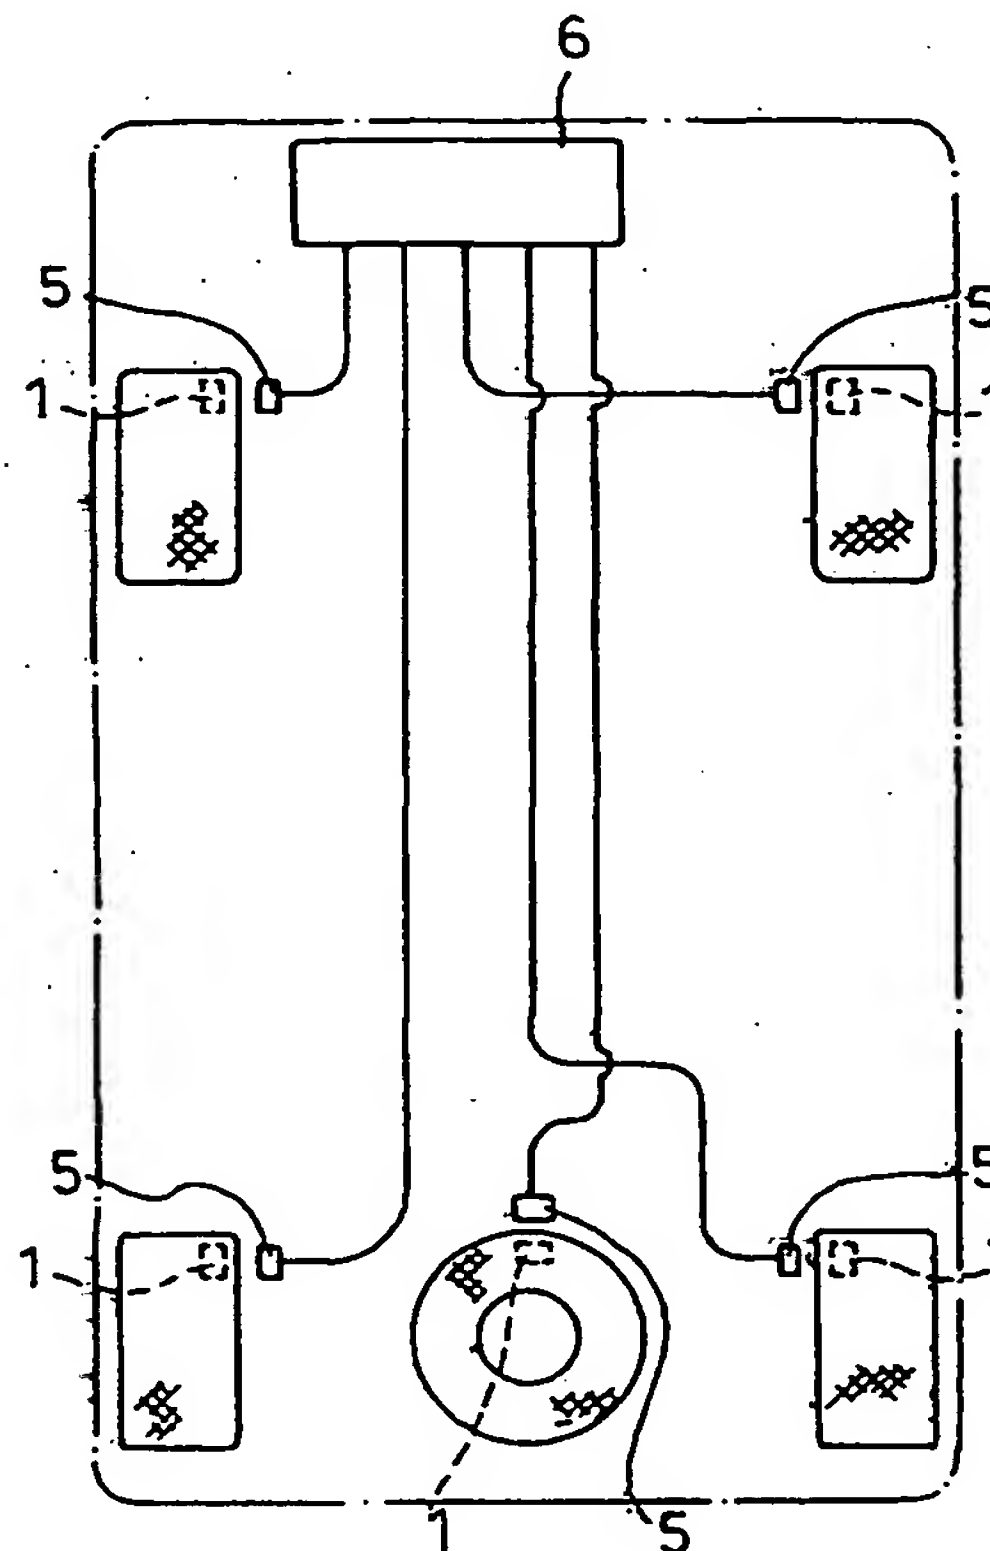


FIG.1

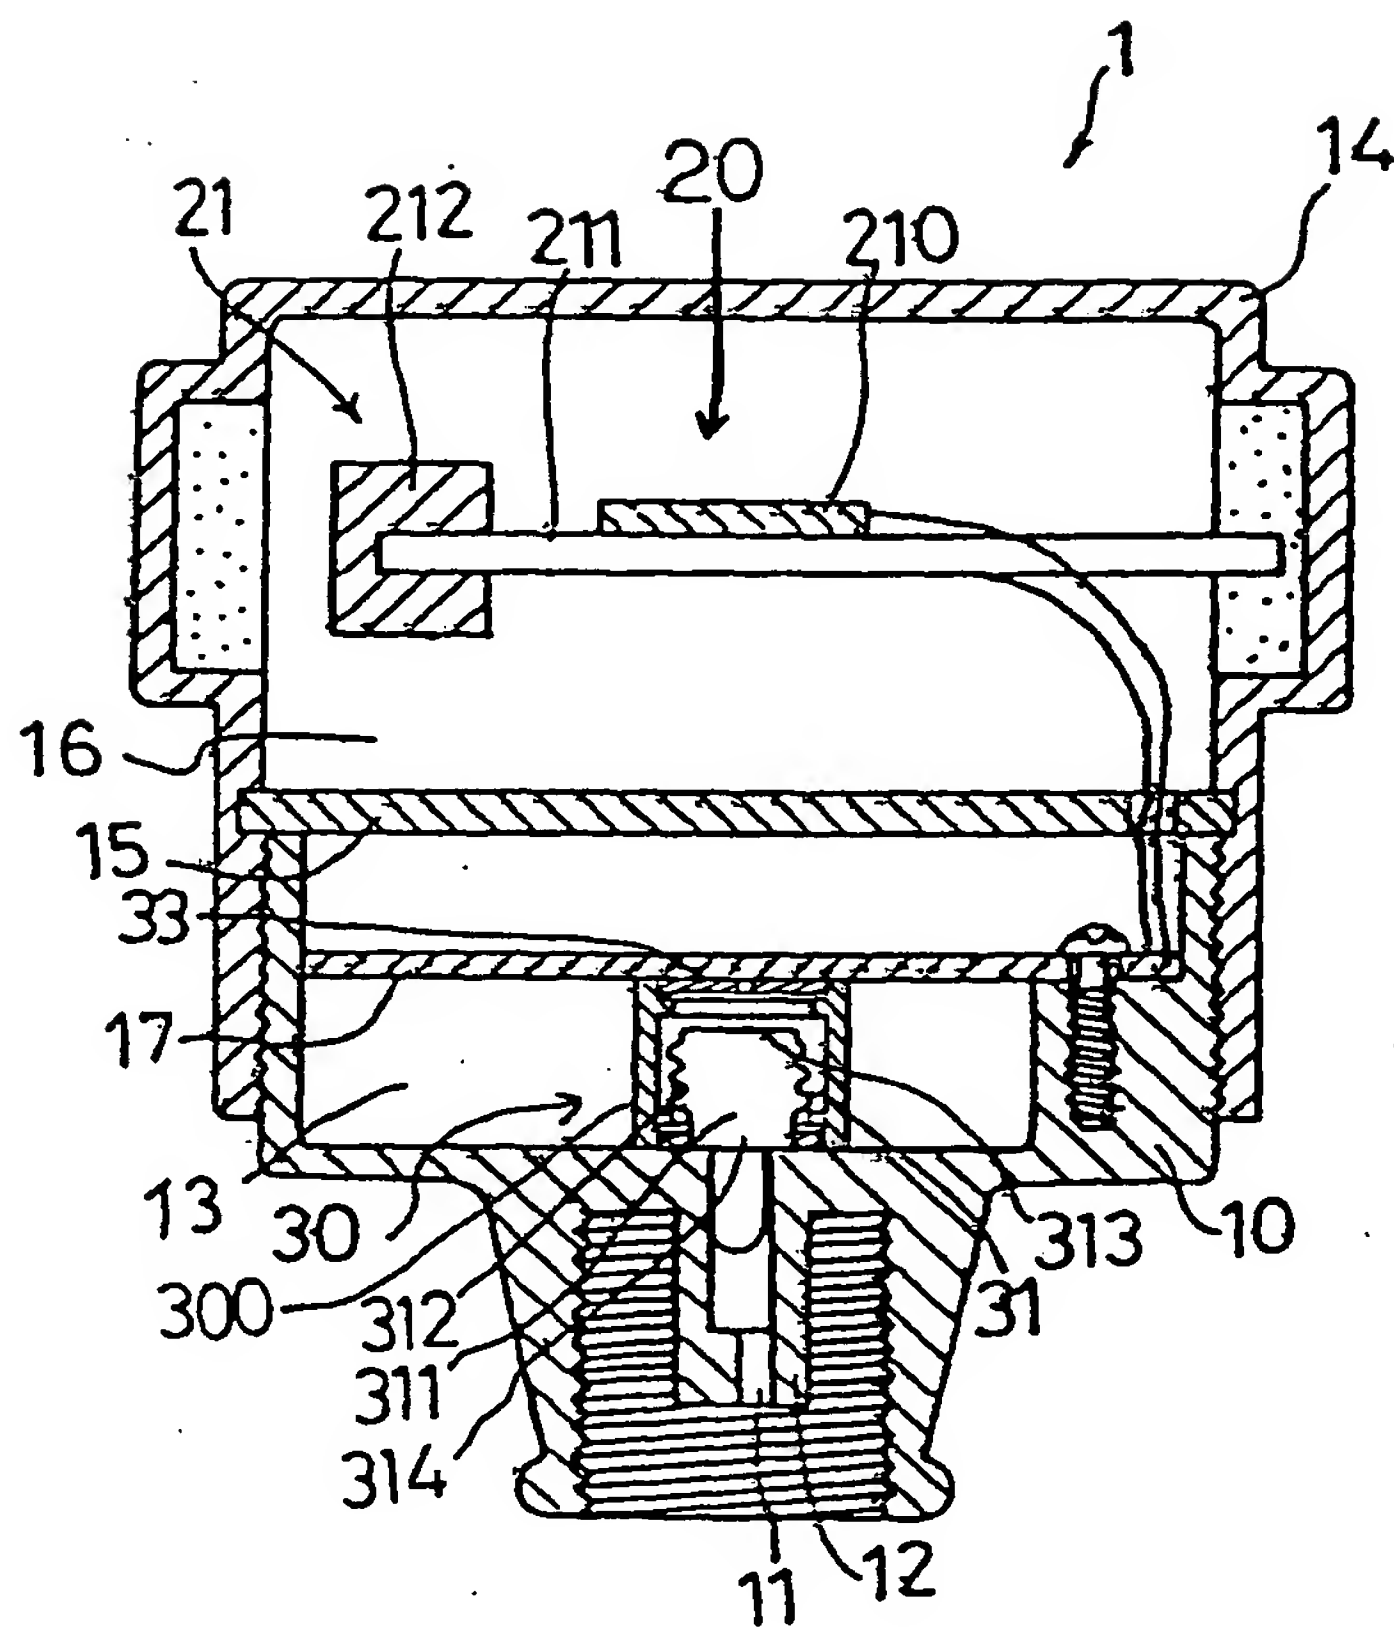


FIG.2

Description

BACKGROUND OF THE INVENTION

1. Field of the Invention

[0001] The invention relates to a tire pressure indicator, more particularly to one including pressure gauges that have a self-generating power capability.

2. Description of the Related Art

[0002] A tire pressure indicator is to be installed in a vehicle to monitor the pressure of the tires of the vehicle. A regular tire pressure indicator is generally comprised of a set of pressure gages, each of which is mounted on a corresponding pneumatic tire of the vehicle, and a receiver device. Each pressure gauge wirelessly transmits a pressure signal to the receiver device when the pressure in the corresponding pneumatic tire is not within a predetermined normal operating pressure range. As such, the receiver device can alert the driver of the vehicle in the event of an abnormal tire pressure condition.

[0003] Since the receiver device of a known tire pressure indicator is built into an instrument panel of the vehicle, or as a separate device to be installed in the driver's compartment of the vehicle, the power source of the vehicle can be used as the power source for the receiver device. However, since the pressure gauges of the known tire pressure indicator are mounted on the tires of the vehicle, battery cells are used as the power source for the pressure gauges. The need to replace the battery cells when they run out of power inconveniences the owner of the vehicle.

[0004] In order to eliminate the aforesaid problem, the same applicant filed an application for a tire pressure indicator, which subsequently issued as U.S. Patent No. 5,694,111. The structure of this tire pressure indicator comprises a piezoelectric type self-generating voltage means, and an LC oscillatory loop formed of a volume variable member, a magnetic core, and an induction coil. This structure of the tire pressure indicator is functional, however, the installation cost of the LC oscillatory loop is expensive.

SUMMARY OF THE INVENTION

[0005] It is an object of the present invention to provide a tire pressure indicator which has self-provided power generating means to provide the necessary working power economically.

[0006] It is another object of the present invention to provide a wireless tire pressure indicator, which eliminates radio signal transmission interference.

[0007] According to the present invention, the tire pressure indicator comprises a plurality of pressure gauges, at least one receiver circuit adapted to be installed in the vehicle to receive output signal from said

pressure gauges wirelessly, and a controller. Each of the pressure gauges comprises a casing, a power supplying device, a pressure sensing unit, and a transmitter circuit.

The power-supplying device comprises a self-generating voltage unit. The self-generating voltage unit comprises a spring element having a first end secured to a casing and a second end, a weight securely mounted on the second end of the spring element, and a piezoelectric unit securely mounted on the spring element.

The spring element is vibrated upon motion of the respective pneumatic tire, thereby causing the piezoelectric unit to generate a voltage output to the pressure sensing unit and the transmitter circuit. The pressure sensing unit comprises a capacitor means. The capacitor means comprises a motion member, a conductive member, and a converting circuit. The motion member is made of electrically conductive material and is spaced from the conductive member at a distance. The distance between the motion member and the conductive member is changed subject to the air pressure of respective pneumatic tire, thereby causing the capacity of the capacitor means to be changed relatively. The converting circuit comprises an oscillator connected to the capacitor means such that the converting circuit detects the number of RC oscillating waves from the oscillator and converts the detected signal into a first signal indication of the pressure of the respective pneumatic tire. The transmitter circuit receives the first signal from the pressure-sensing unit, and outputs a second signal by radio.

A respective receiver circuit is installed in the vehicle adjacent to each pneumatic tire. The motion member comprises a top side wall, a bottom mouth, and a bellows-like peripheral wall connected between the top side wall and the bottom mouth and defining an air chamber in communication with the bottom mouth. The bottom mouth receives air pressure from the respective pneumatic tire for moving the top side wall relative to the conductive member so as to change the capacity of the capacitor means subject to the pressure of the respective pneumatic tire.

BRIEF DESCRIPTION OF THE DRAWINGS

[0008] Other features and advantages of the present invention will become apparent in the following detailed description of the preferred embodiments, with reference to the accompanying drawings, of which:

Figure 1 is a schematic view illustrating the first preferred embodiment of a tire pressure indicator according to the present invention when installed on a vehicle;

Figure 2 is a sectional view of a pressure gauge of the first preferred embodiment;

Figure 3 is a schematic circuit block diagram of the pressure gauge shown in Figure 2;

Figure 4 is a schematic circuit diagram illustrating a rectifying circuit, a charging circuit and a re-

chargeable cell unit of a power supplying device of the pressure gauge shown in Figure 2;

Figure 5 is an exploded view of a capacitor means for a pressure gauge according to the present invention.

Figure 6 is a sectional view of an assembled capacitor means according to the present invention;

Figure 7 is a schematic circuit block diagram of a receiver circuit of the first preferred embodiment;

Figure 8 is a schematic circuit diagram of the receiver circuit of the first preferred embodiment;

Figure 9 is a schematic circuit block diagram illustrating a controller of the first preferred embodiment of the present invention;

Figure 10 is a sectional view of an alternative form of an assembled capacitor means according to the present invention;

Figure 11 is a sectional view of another alternative form of an assembled capacitor means according to the present invention;

Figure 12 is a sectional view of still another alternative form of an assembled capacitor means according to the present invention;

Figure 13 is a sectional view of still another alternative form of an assembled capacitor means according to the present invention;

Figure 14 illustrates an elastic strap used to secure the pressure gauge to the disk wheel of a pneumatic tire;

Figure 15 is a schematic view illustrating the pressure gauge when secured to the metal wheel of a pneumatic tire;

Figure 16 is a partially exploded view illustrating a casing and a coupling seat of a pressure gauge of the third preferred embodiment of the tire pressure indicator according to the present invention; and

Figure 17 is a schematic view illustrating how the coupling seat secures the casing to the disk wheel of a pneumatic tire.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0009] Referring to Figure 1, a first preferred embodiment of the tire pressure indicator according to the present invention is shown, comprised of a set of pressure gauges 1, a set of receiver circuits 5, and a controller 6. Each of the pressure gauges 1 is adapted to be mounted on the inflating valve of a respective one of the pneumatic tires on a vehicle, and wirelessly transmits a pressure signal corresponding to the pressure in the respective one of the pneumatic tires. Each of the receiver circuits 5 is adapted to be mounted on the vehicle adjacent to a respective one of the pneumatic tires so as to receive the pressure signal from the pressure gauge 1 on the adjacent one of the pneumatic tires. The controller 6, which is preferably built into an instrument panel (not shown) on the vehicle, is connected to the

receiver circuits 5. The controller 6 alerts the driver of the vehicle in the event of an abnormal tire pressure condition.

[0010] Referring to Figures 2 and 3, the pressure gauge 1 comprises a casing 10 having mounted therein a power supplying device 20, a pressure sensing unit 30, and a signal transmitter circuit 40.

[0011] The casing 10 comprises a passage 11 in communication with the inside or air valve of the respective pneumatic tire, a tubular finger piece 12 inserted into the passage 11. When the pressure gauge 1 is installed in the respective pneumatic tire, the air of the pneumatic tires passes through the passage 11 into the casing 10, filling a first chamber 13 of the casing 10. A cap 14 is threadably connected with the casing 10. A partition plate 15 is mounted in the cap 14, defining a second chamber 16. A circuit board 17 is mounted within the first chamber 13. The pressure sensing unit 30 and the signal transmitter circuit 40 are mounted on the circuit board 17 inside the first chamber 13.

[0012] Referring to Figure 3 again, the power supplying device 20 provides the circuit board 17 with the necessary working power supply, comprised of a self-generating voltage unit 21, a rectifying circuit 22, a charging circuit 23, a stand-by power supplying means, for example a rechargeable cell unit 24, and a power control circuit 25. As illustrated in Figure 2, the self-generating voltage unit 21 is disposed in the second chamber 16, and comprises a piezoelectric unit 210, a spring plate 211, and a weight 212. The spring plate 211 has one end secured to an inner peripheral wall of the second chamber 16, and the other end fixed with the weight 212. The weight 212 enables the spring plate 211 to produce a broad amplitude of vibration. When the pneumatic tires of the vehicle are rotated, the spring plate 211 of the self-generating voltage unit 21 is forced to vibrate continuously, causing the piezoelectric unit 210 to produce a piezoelectric effect and generate an AC voltage output.

[0013] Referring to Figure 4, the rectifying circuit 22 is a full-wave rectifier, comprised of four diodes D1~D4 for rectifying AC power supply from the piezoelectric unit 210 into DC power supply. The charging circuit 23 comprises a voltage storing member 230 (for example, a capacitor), a current limiter 231 (for example, a current limit diode), and a protective member 232 (for example, a zener diode). The rectifying circuit 22 charges the voltage-storing member 230. The current limiter 231 limits the amount of current flowing from the rectifying circuit 22 to the rechargeable cell unit 24. The protective member 232 limits the voltage passing through the rechargeable cell unit 24.

[0014] Referring to Figures 3 and 4 again, the rechargeable cell unit 24 is connected to the output end of the charging circuit 23, so as to be charged by the self-generating voltage unit 21. The rechargeable cell unit 24 provides the necessary working power supply when the vehicle is temporarily stopped. The power con-

trol circuit 25 is connected to the rectifying circuit 22. The power control unit 25 electrically disconnects the rechargeable cell unit 24 from the pressure sensing unit 30 and the signal transmitter unit 40 a certain length of time after the pneumatic tire has been stopped, the self-generating voltage unit 21 has been turned off, and the output of the rectifying circuit 22 has reached zero voltage.

[0015] Referring to Figures 5 and 6, and to Figures 2 and 3 again, the pressure sensing unit 30 comprises a capacitor means 300. The capacitor means 300 comprises a motion member 31, a conductive member 33, and a converting circuit 34. The conductive member 33 is, for example, a thin copper plate mounted in between the passage 11 and the first chamber 13. The motion member 31 comprises an air chamber 311, a plurality of bellows 312 around the air chamber 311, a top wall 313, and a bottom mouth 314. The bottom mouth 314 enables air to pass into the air chamber 31 and to impact on the top wall 313, causing the distance between the top wall 313 and the conductive member 33 to be changed, so as to further change the capacity of the capacitor means 300. The motion member 31 and the conductive member 33 are mounted within an insulative shell 315, and are spaced from each other at a distance. Insulative covers 316 are respectively placed on the top and bottom sides of the insulative shell 315. An insulator 317 is set between the motion member 31 and the conductive member 33 to prevent a short circuit.

[0016] The converting circuit 34 comprises a processor 340, and an oscillator 341. The capacitor means 300 is connected to the oscillator 341 so that when the distance between the top wall 313 and the conductive member 33 is changed, the output RC oscillating frequency of the oscillator 341 is relatively changed. The processor 340 detects the oscillating frequency output of the oscillator 341, and converts the same into a corresponding pressure value. The processor 340 then controls the signal transmitter circuit 40 to transmit a second signal of radio signal indication of the pressure value.

[0017] Referring to Figures 7 and 8, and to Figure 1 again, each of the receiver circuits 5 is adapted to be mounted on the vehicle adjacent to a respective one of the pneumatic tires so as to receive the pressure signal from the pressure gauge 1 on an the adjacent pneumatic tire with minimal signal interference, thereby improving the accuracy of the tire pressure indicator of this invention. Each receiver circuit 5 comprises a receiving antenna 51, a high frequency amplifying circuit 52, a wave detecting circuit 53, a low pass filter circuit 54, a low frequency amplifier 55, and a pulse shaping circuit 56.

[0018] The receiving antenna 51 receives the pressure signal from the pressure gauge 1 on an adjacent pneumatic tire and provides the same to the high frequency amplifying circuit 52. The high frequency amplifying circuit 52 comprises a first stage amplifier 520 connected to the receiving antenna 51, a filter 521 connect-

ed to the first stage amplifier 520, a second stage amplifier 522 connected to the filter 521, and a third stage amplifier 523 connected to the second stage amplifier 522. The wave detecting circuit 53 is connected to the high frequency amplifying circuit 52. The low pass filter circuit 54 is connected to the wave detecting circuit 53. The low frequency amplifier 55 is connected to the low pass filter circuit 54. The pulse shaping circuit 56 is connected to the low frequency amplifier 55. The analog voltage output of the low frequency amplifier 55 is processed into a digital third signal by the pulse shaping circuit 56.

[0019] Referring to Figure 9, the controller 6 is shown, comprised of a voltage regulator 60, a control circuit 61, and an indicating unit 62.

[0020] The voltage regulator 60 is adapted to be connected to the power source (not shown) of the vehicle, and provides an operating voltage to the control circuit 61 and the indicating unit 62. A light emitting diode 600 is connected to the voltage regulator 60, and is operable so as to emit light when power is supplied to the controller 6. The control circuit 61, such as a microprocessor, is connected to the receiver circuits 5 and processes the digital pulse signals therefrom to obtain the pressure values of the pneumatic tires. The indicating unit 62 is connected to the control circuit 61, and includes a sound alarm unit 620 and a display unit 621. The sound alarm unit 620 is activated by the control circuit 61 when the pressure value in any of the pneumatic tires is not within a normal operating pressure range. The display unit 621 can be a liquid crystal display or a light emitting diode display, and is activated by the control circuit 61 to identify the abnormal pneumatic tire(s), the pressure value of which is not within the normal operating pressure range. The display unit 621, which can be an LCD or LED, is further activated by the control circuit 61 to display the pressure value of the abnormal pneumatic tire(s).

[0021] Figure 10 shows a second embodiment of the capacitor means 300a according to the present invention. This alternative form is similar to the aforesaid first embodiment with the exception of the conductive member 33. According to this alternative form, the conductive member 33 is a metal screw member threaded into a screw hole 3151 at the insulative shell 315. By turning the conductive member 33 up and down in the screw hole 3151, the capacity of the capacitor means 300 is easily preadjusted relatively.

[0022] Figure 11 shows a third embodiment of the capacitor means 300b according to the present invention. According to this alternative form, the conductive member 33 comprises a tubular flange 3152 extended downwardly from its bottom side wall, a rod 318 is raised from the top wall 313 of the motion member 31 and suspended in the tubular flange 3152. When the volume of the motion member 31 is changed, the elevation of the rod 318 in the tubular flange 3152 is relatively changed, and therefore the capacity of the capacitor means 300 is

changed relatively.

[0023] Figure 12 shows a fourth embodiment of the capacitor means 300c according to the present invention. According to this alternative form, the motion member 31 is a thin copper diaphragm having corrugated portions 312, a top side wall 313 and a bottom side wall 310. The bottom side wall 310 receives air pressure from the respective pneumatic tire, enabling the distance between the top side wall 313 and the conductive member 33 to be relatively changed, subject to the value of the air pressure received, so as to relatively change the capacity of the capacitor means 300.

[0024] Figure 13 shows a fifth embodiment of the capacitor means 300d according to the present invention. According to this alternative form, the conductive member 33 comprises a tubular flange 3152 extended downwardly from its bottom side wall, a rod 318 is raised from the top side wall 313 of the motion member 31 and suspended in the tubular flange 3152.

[0025] Referring to Figures 14 and 15, an elastic strap 90 is provided with two hooks 91 at its two opposite ends for engaging respective holes 92 at the casing 10 and the cap 14 so as to secure the pressure gauge 1 to the metal wheel of the respective pneumatic tire, enabling the pressure gauge 1 to detect the pressure of the respective pneumatic tire.

[0026] Referring to Figures 16 and 17, a substantially L-shaped coupling seat 93 is mounted on the rim of the pneumatic tire. The coupling seat 93 is at one side fixed with the air valve 96 of the pneumatic tire, and at an opposite side formed with a coupling portion, such as an inner thread 94. The casing 10 of the pressure gauge 1 has a coupling portion, such as an outer thread 95, for being engaged with the coupling portion 94.

[0027] Since the pressure gauges of the tire pressure indicator of this invention are capable of generating power when the pneumatic tires are in motion, the possibility that the pressure gauges will run out of power can be eliminated so as to ensure proper operation of the pressure gauges without causing any inconvenience to the owner of the vehicle. The purpose of the present invention is thus achieved.

[0028] While the present invention has been described in connection with what is considered the most practical and preferred embodiments, it is understood that this invention is not limited to the disclosed embodiments, but is intended to cover various arrangements included within the spirit and scope of the broadest interpretation of the present invention so as to encompass all such modifications and equivalent arrangements.

Claims

1. A tire pressure indicator for the pneumatic tires of a vehicle, said tire pressure indicator comprising a plurality of pressure gauges (1) and at least one receiver circuit (5) adapted to be installed in the vehi-

cle to receive output signal from said pressure gauges wirelessly, and characterised in that it includes a controller (6) and said pressure gauges each comprise a casing (10), a power supply device (20), a pressure sensing unit (30) and a transmitter circuit (40),

said power supplying device (20) comprising a self-generating voltage unit (21), said self-generating voltage unit comprising a spring element (21) having a first end secured to said casing (10) and a second end, a weight (212) securely mounted on the second end of said spring element, and a piezoelectric unit (210) securely mounted on said spring element (211), said spring element being vibrated upon motion of the respective pneumatic tire, thereby causing said piezoelectric unit (210) to generate a voltage output to said pressure sensing unit (30) and said transmitter circuit (40);

said pressure sensing unit (30) comprising a capacitor means (300), said capacitor means comprising a motion member (31), a conductive member (33), and a converting circuit (34), said motion member (31) being made of electrically conductive material and spaced from said conductive member (33) at a distance, said distance being changed subject to the air pressure of respective pneumatic tire, thereby causing the capacity of said capacitor means (300) to be changed relatively, said converting circuit (34) comprising an oscillator (341) connected to said capacitor means such that said converting circuit detects the number of AC oscillating waves from said oscillator (341) and converts detected signal into a first signal indication of the pressure of the respective pneumatic tire;

said transmitter circuit (40) receiving said first signal from said pressure sensing unit (30) and outputting a second signal by radio;

said receiver circuit (5) outputting a third signal upon receipt of said second signal, and

said controller (6) comprising a control circuit (61) and an indicator circuit (62), said control circuit receiving said third signal from said pressure gauges (1) and processing said third signal into an indication signal through a processor thereof for output through said indicator circuit (62).

2. A tire pressure indicator according to claim 1, characterised in that said motion member (31) comprises a top side wall (313), a bottom mouth (314), a bellows-like peripheral wall connected between said top side wall and said bottom mouth, and defining an air chamber (311) in communication with said bottom mouth, and bottom mouth (314) receiv-

ing air pressure from the respective pneumatic tire for enabling said top side wall (313) to be moved relative to said conductive member (33), so as to change the capacity of said capacitor means (300) subject to the pressure of the respective pneumatic tire.

3. A tire pressure indicator according to claim 1, characterised in that said motion member (31) is a corrugated metal sheet (312) having a top side wall (313) facing said conductive member (33), and a bottom side wall (310), which receives pressure from the respective pneumatic tire for enabling the distance between said top side wall and said conductive member to be changed subject to the air pressure of the respective pneumatic tire, so as to change the capacity of said capacitor means (300). 5 10 15
4. A tire pressure indicator according to any preceding claim, characterised in that the number of said at least one receiver circuit (5) is equal to the number of said pressure gages (1), and each receiver circuit (5) is respectively installed in the vehicle adjacent to one respective pneumatic tire to receive the second signal from the corresponding pressure gauge (1). 20 25
5. A tire pressure indicator according to any preceding claim, characterised in that said power supplying device (20) comprises a stand-by power supply unit (24). 30
6. A tire pressure indicator according to claim 5, characterised in that said stand-by power supply unit (24) is a rechargeable storage battery. 35
7. A tire pressure indicator according to any preceding claim, characterised in that said power supplying device (20) further comprises a charging circuit (23) to boost the voltage of power supply generated by the self-generating voltage unit (21). 40
8. A tire pressure indicator according to claim 7 characterised in that said power supplying device (20) further comprises a power saving control circuit (25) to turn off said stand-by power supply unit for a predetermined length of time after said self-generating voltage unit (21) does no work. 45
9. A tire pressure indicator according to any preceding claim, characterised in that said motion member (31) is made of flexible material. 50
10. A tire pressure indicator according to any preceding claim, characterised in that said receiver circuit (5) comprises a receiving antenna (51), a high frequency amplifying circuit (52), a wave detecting circuit (53), a low frequency amplifier (55), and a pulse 55

shaping circuit (56), said receiving antenna (51) receiving said second signal, enabling the received signal to be processed through said high frequency amplifying circuit (52), said wave detecting circuit (53), said low frequency amplifier (55) to said pulse shaping circuit (56) for waveform shaping, so that said pulse shaping circuit (56) outputs a third signal indication of the value of air pressure in the respective pneumatic tire.

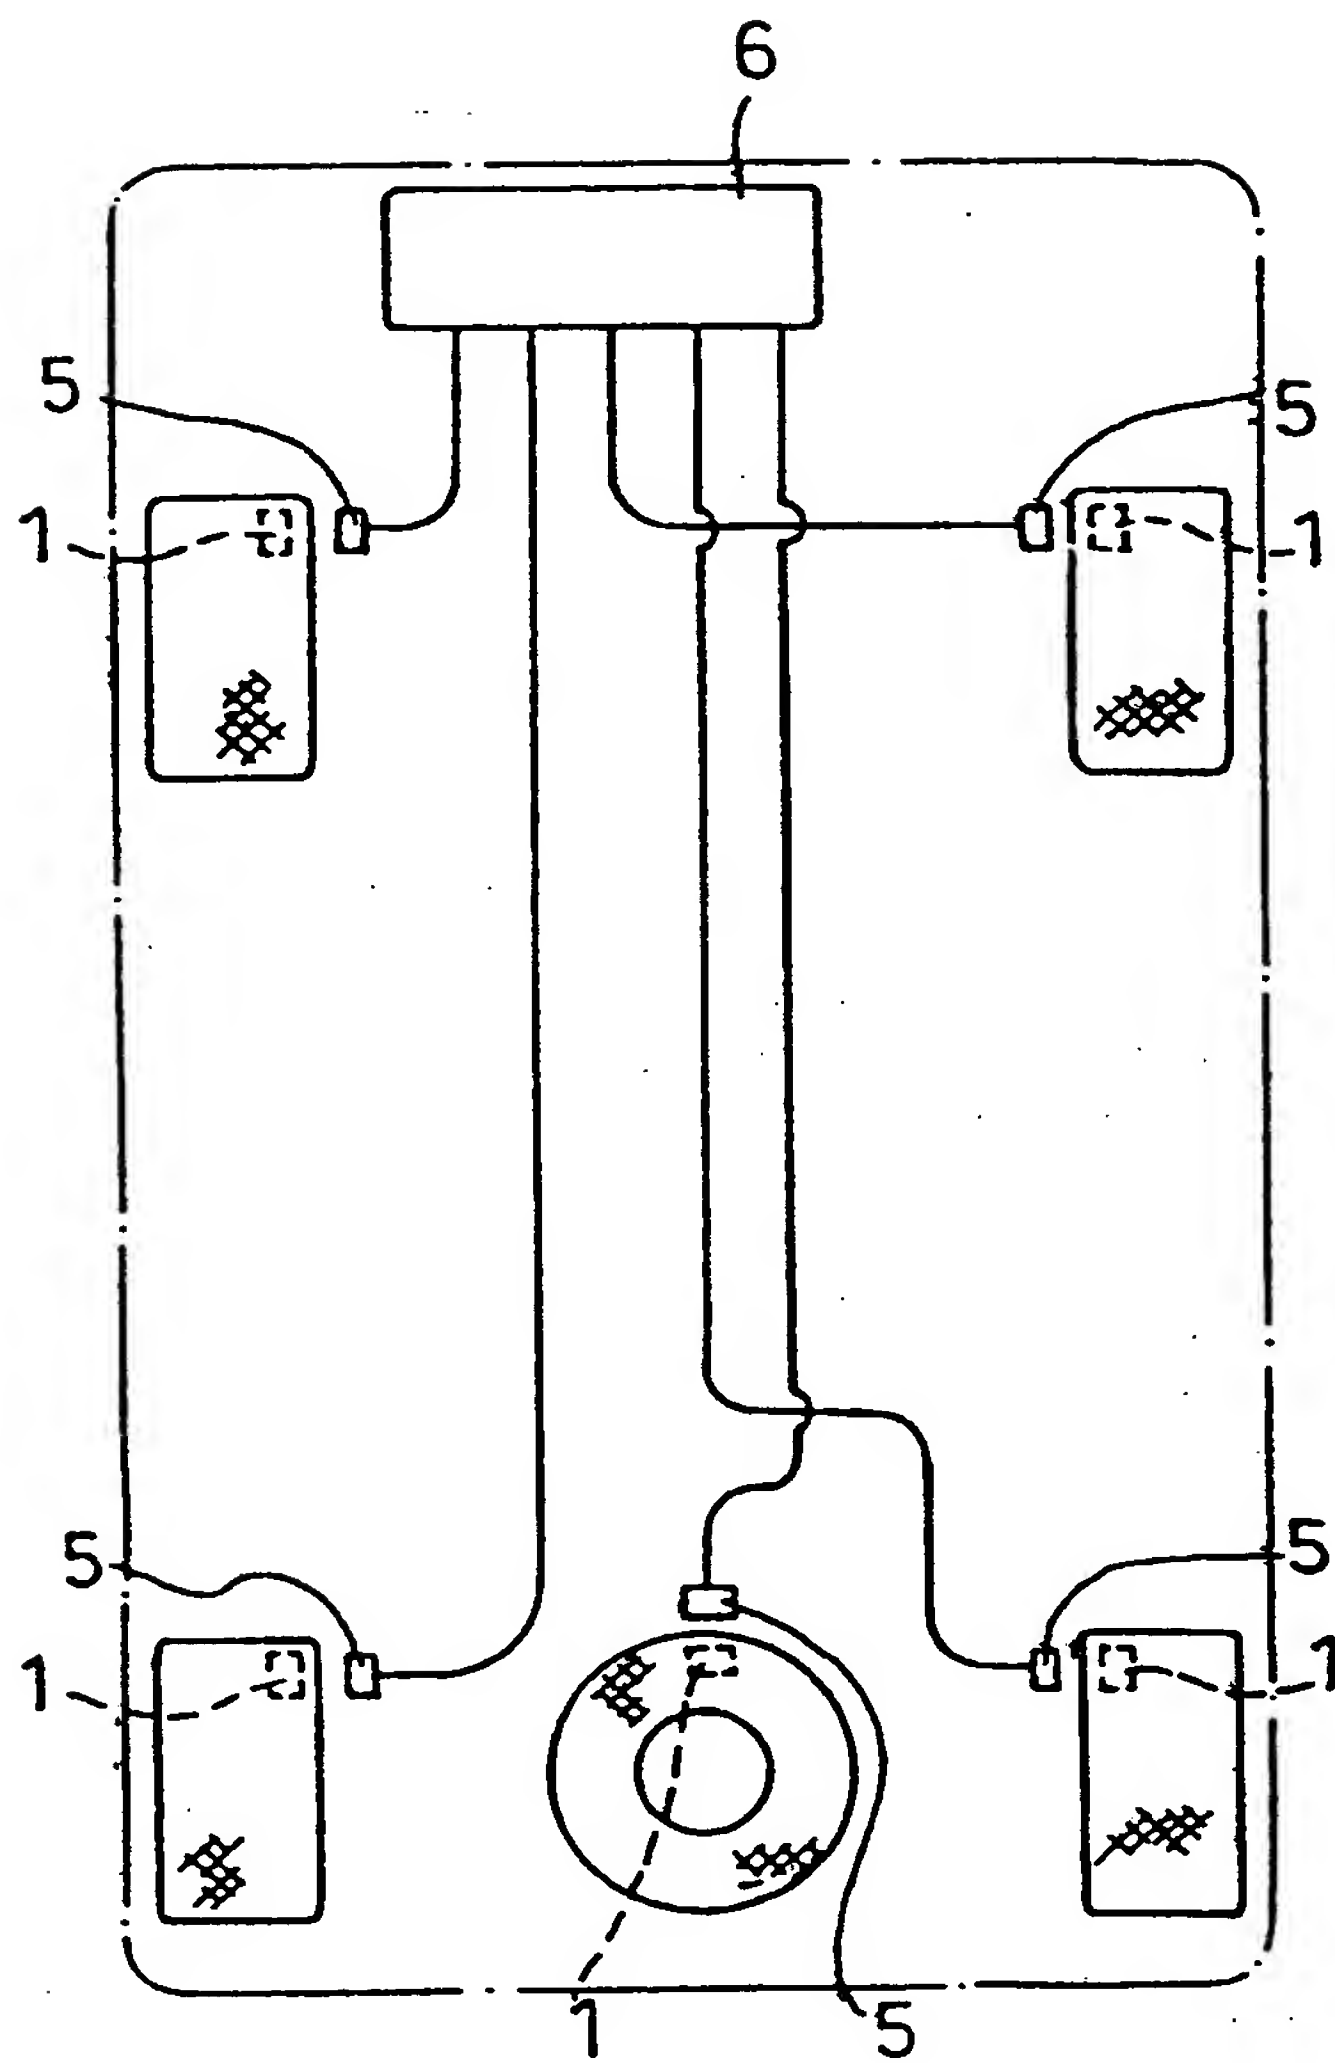
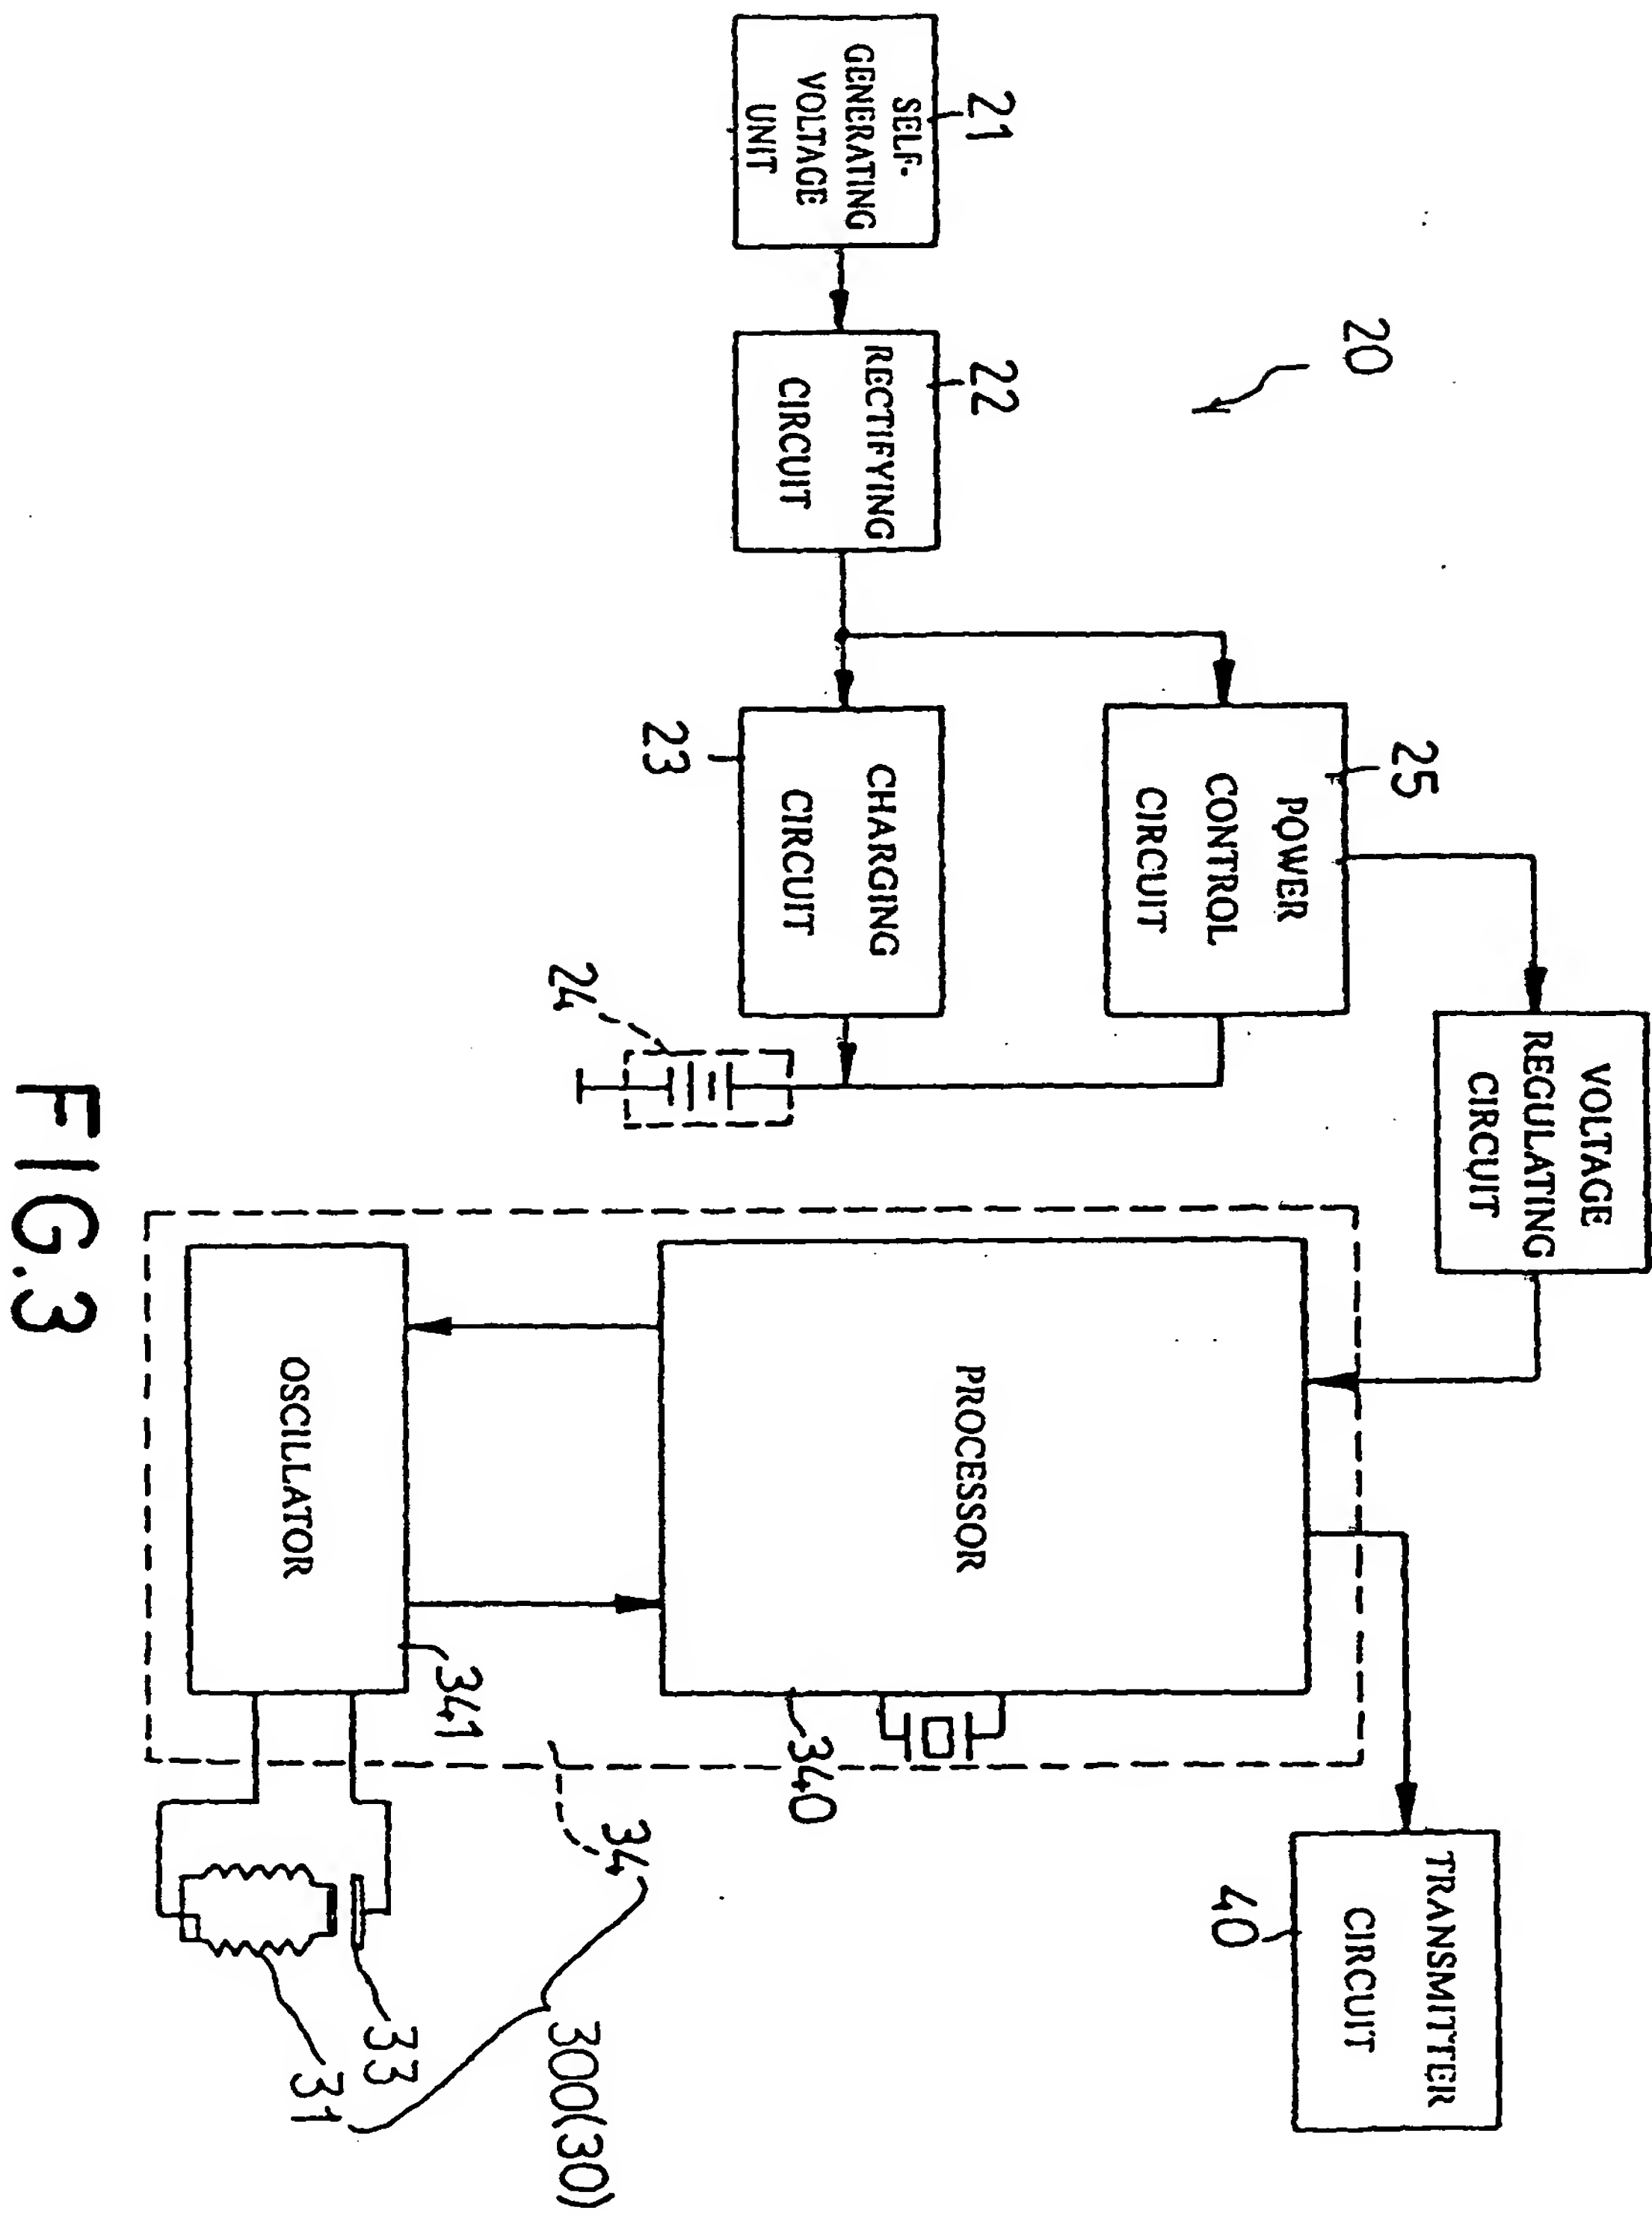


FIG.1



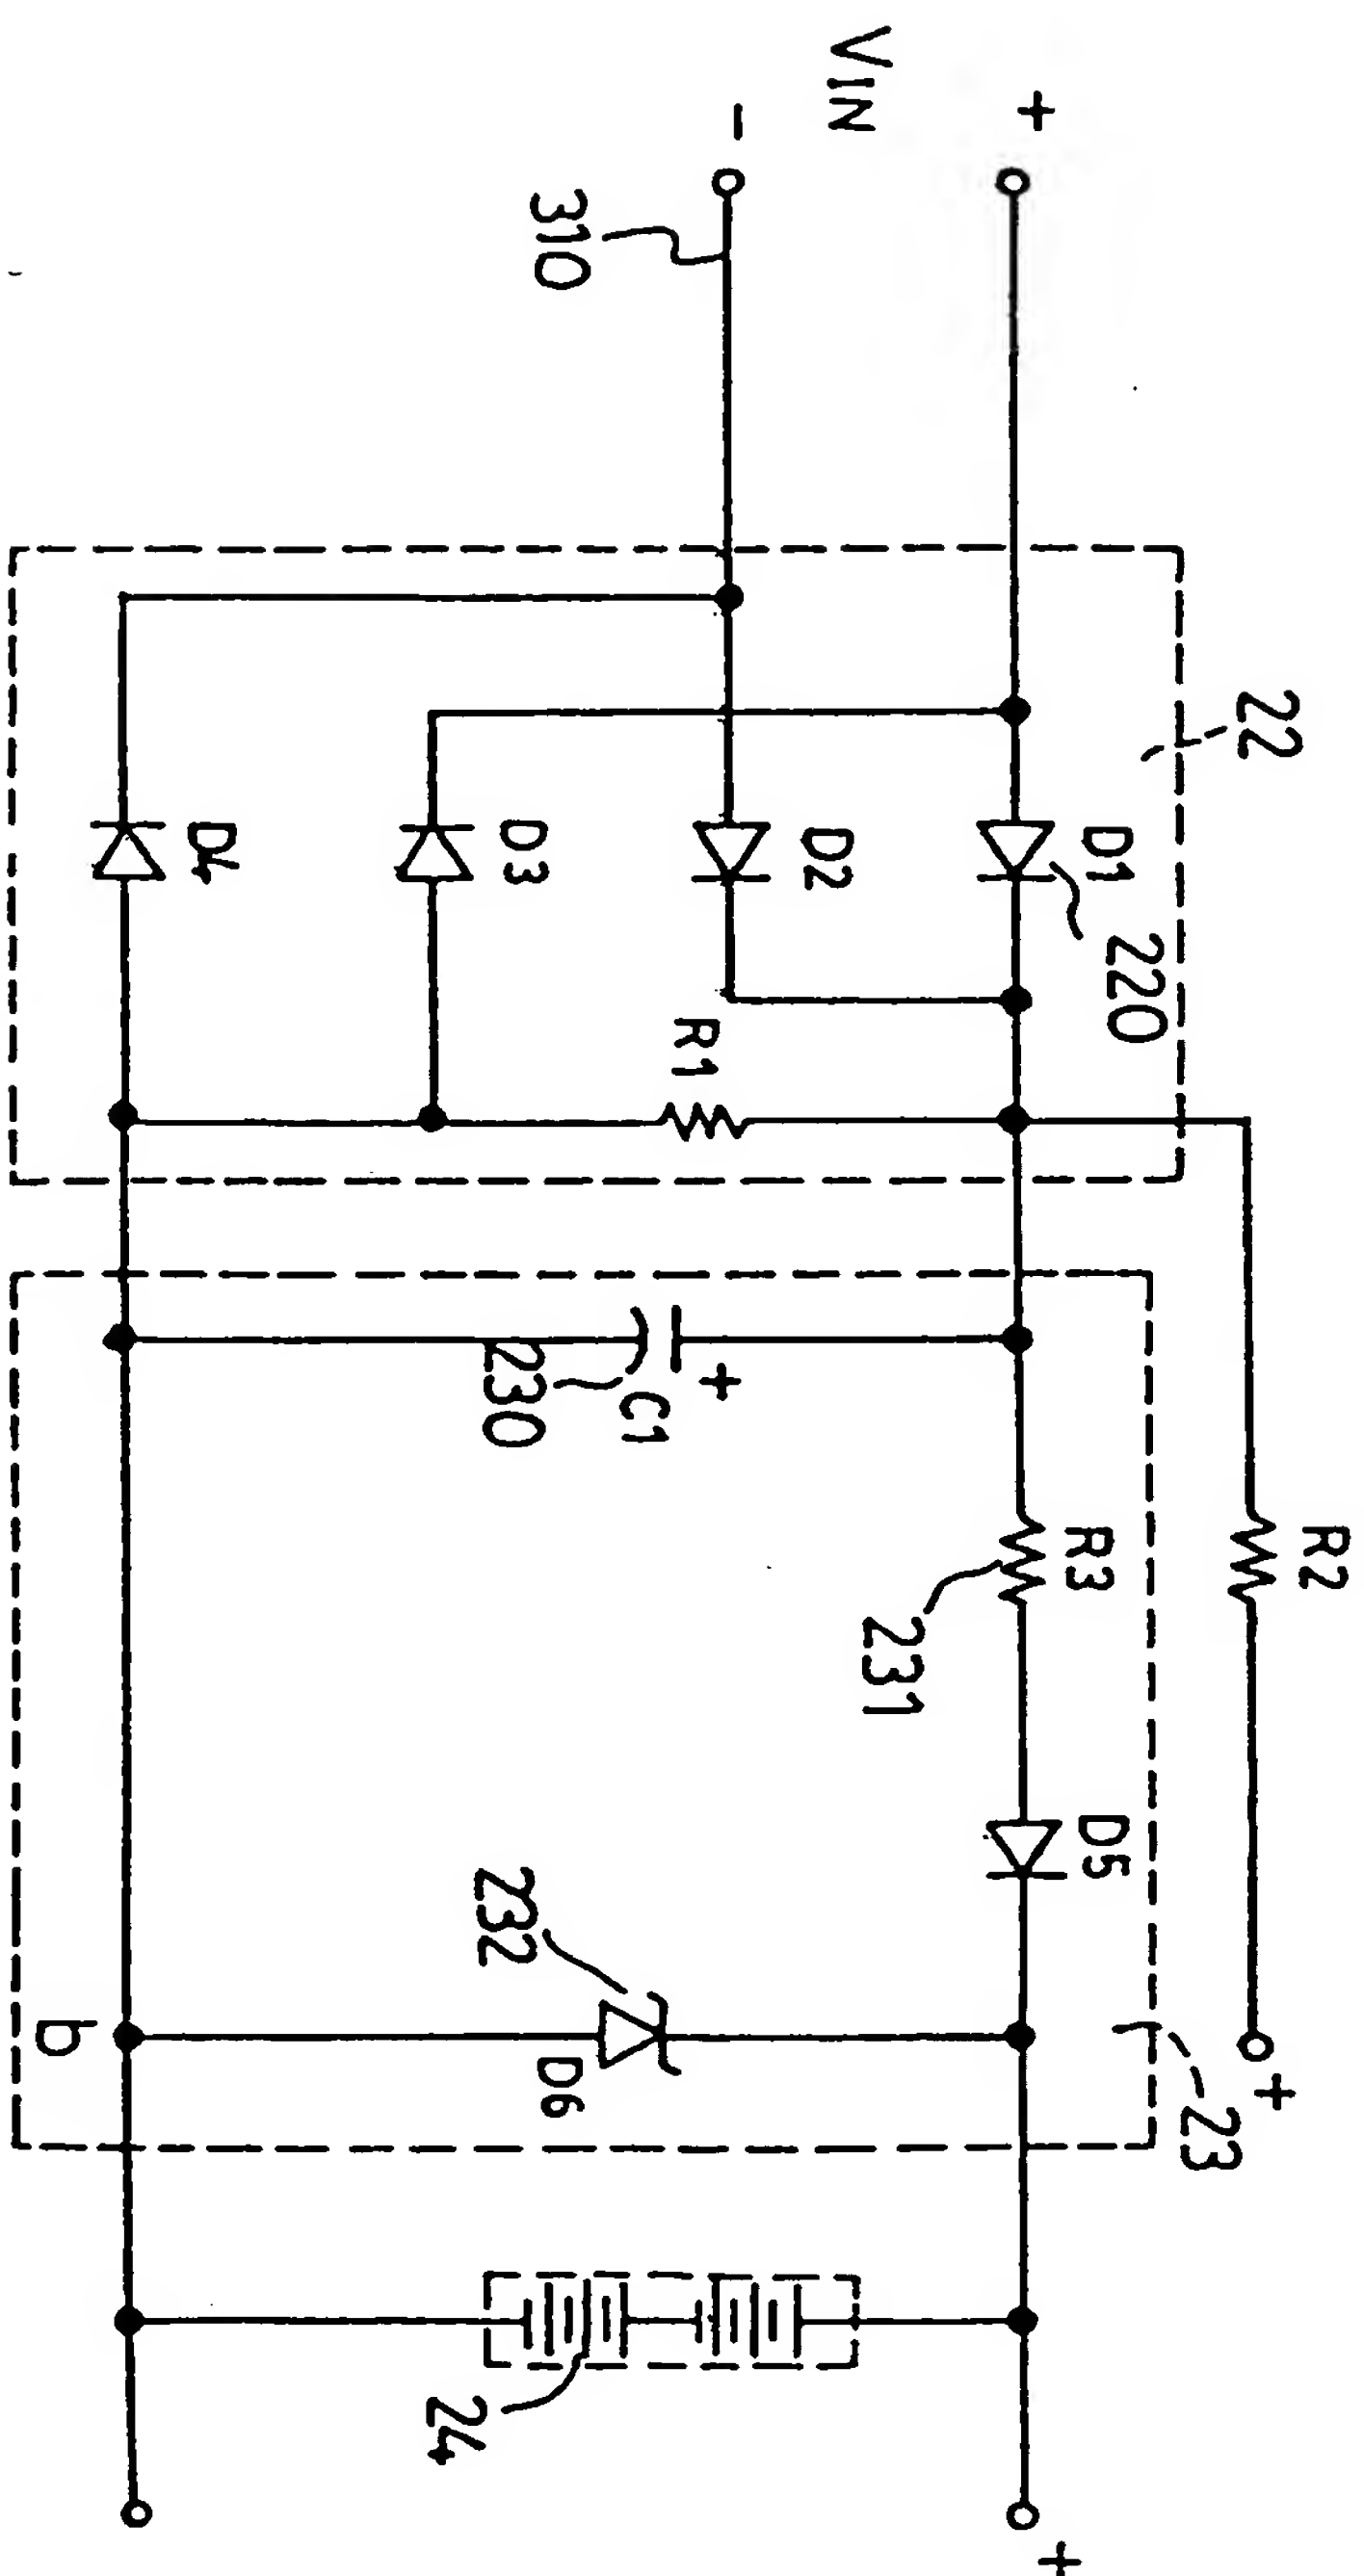


FIG. 4

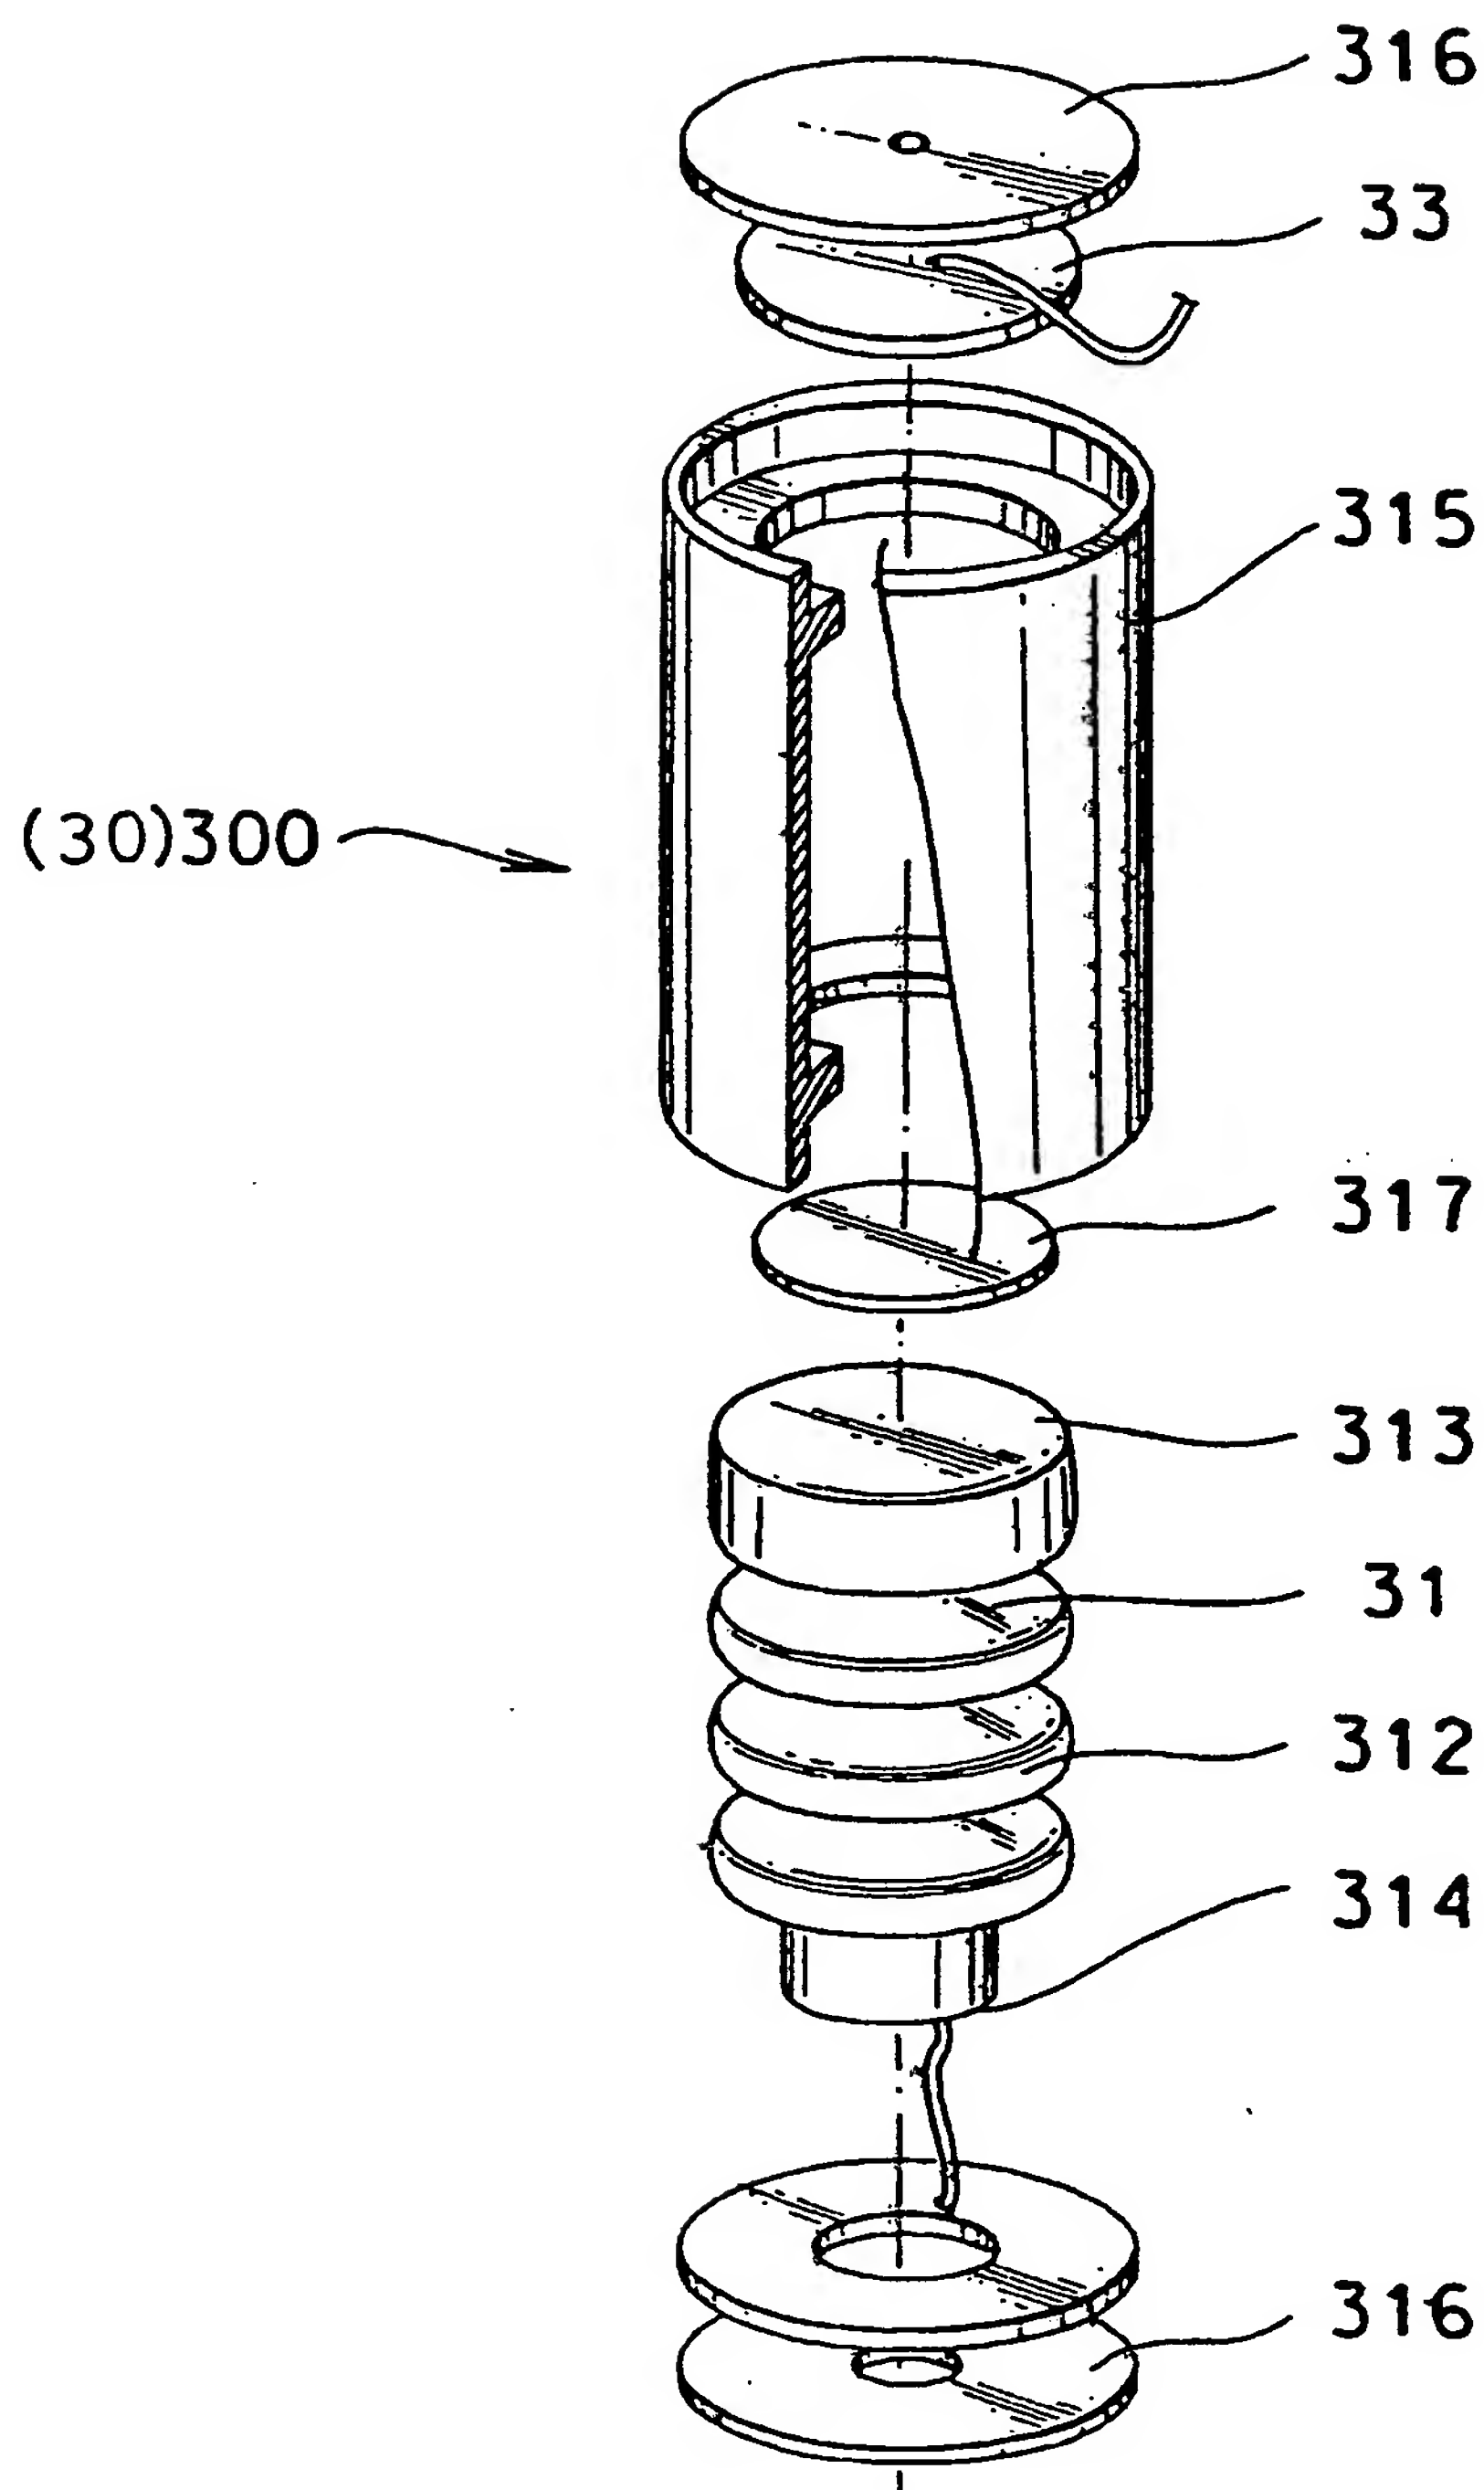


FIG.5

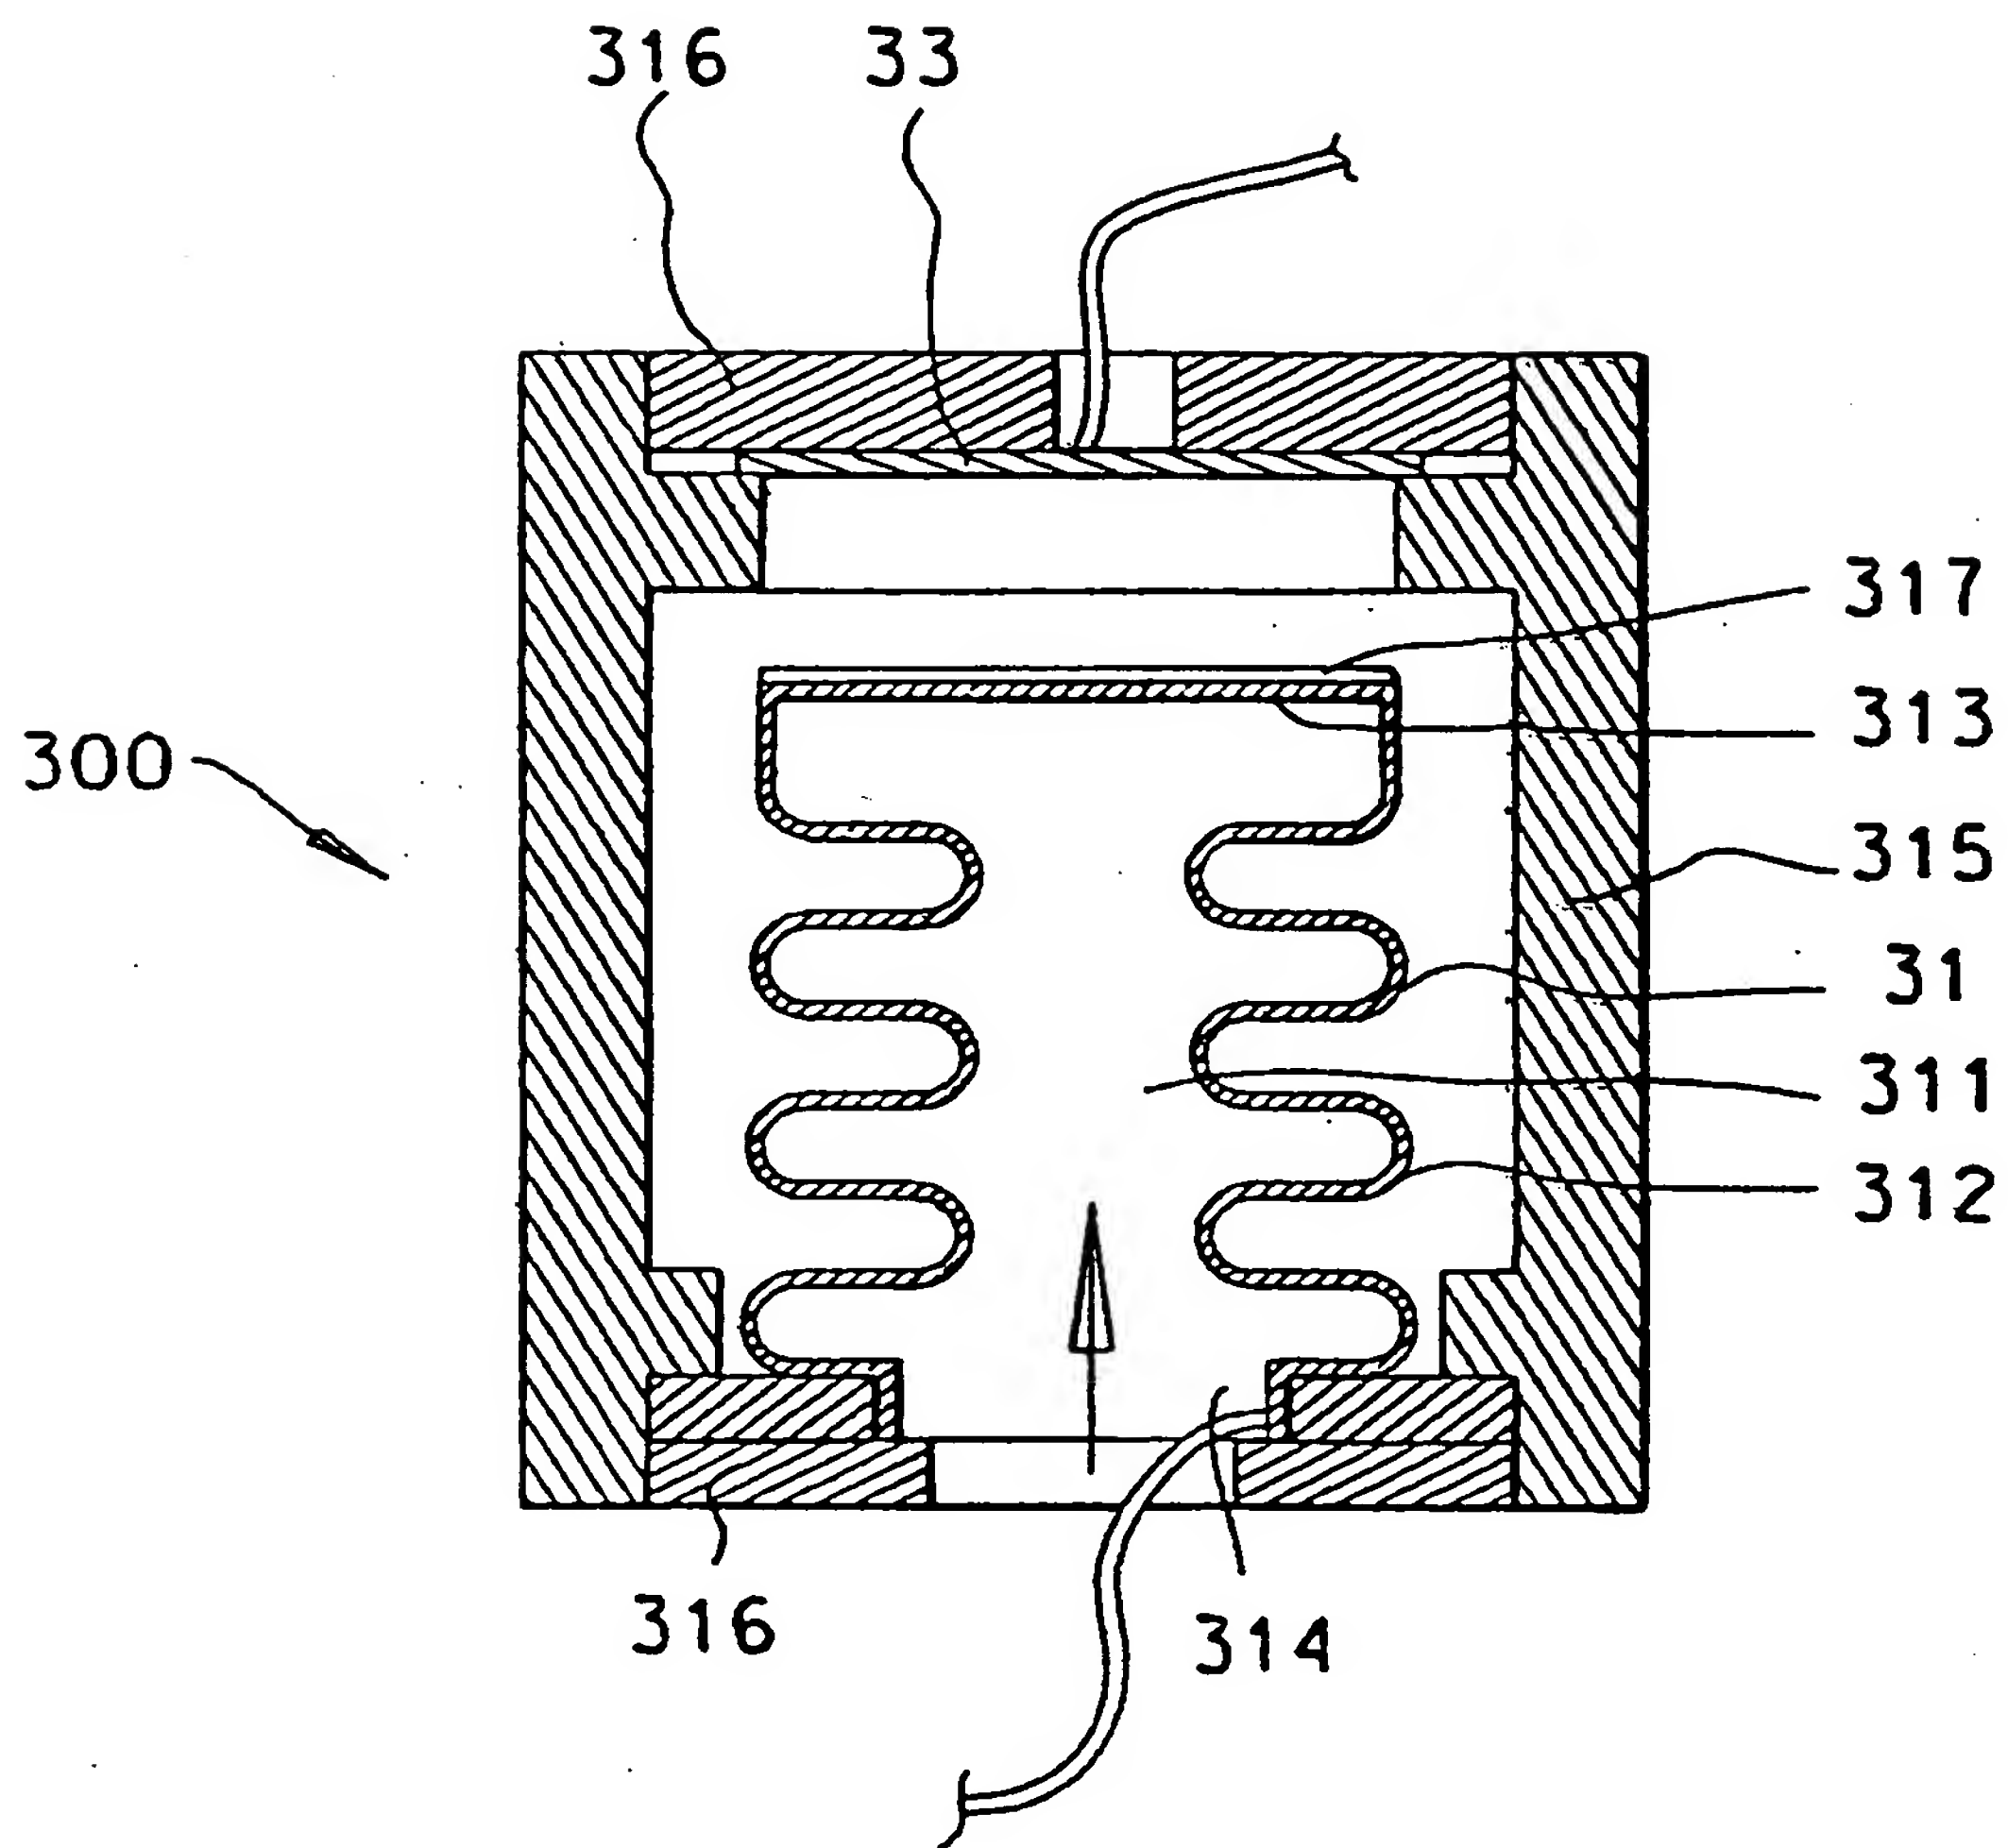


FIG. 6

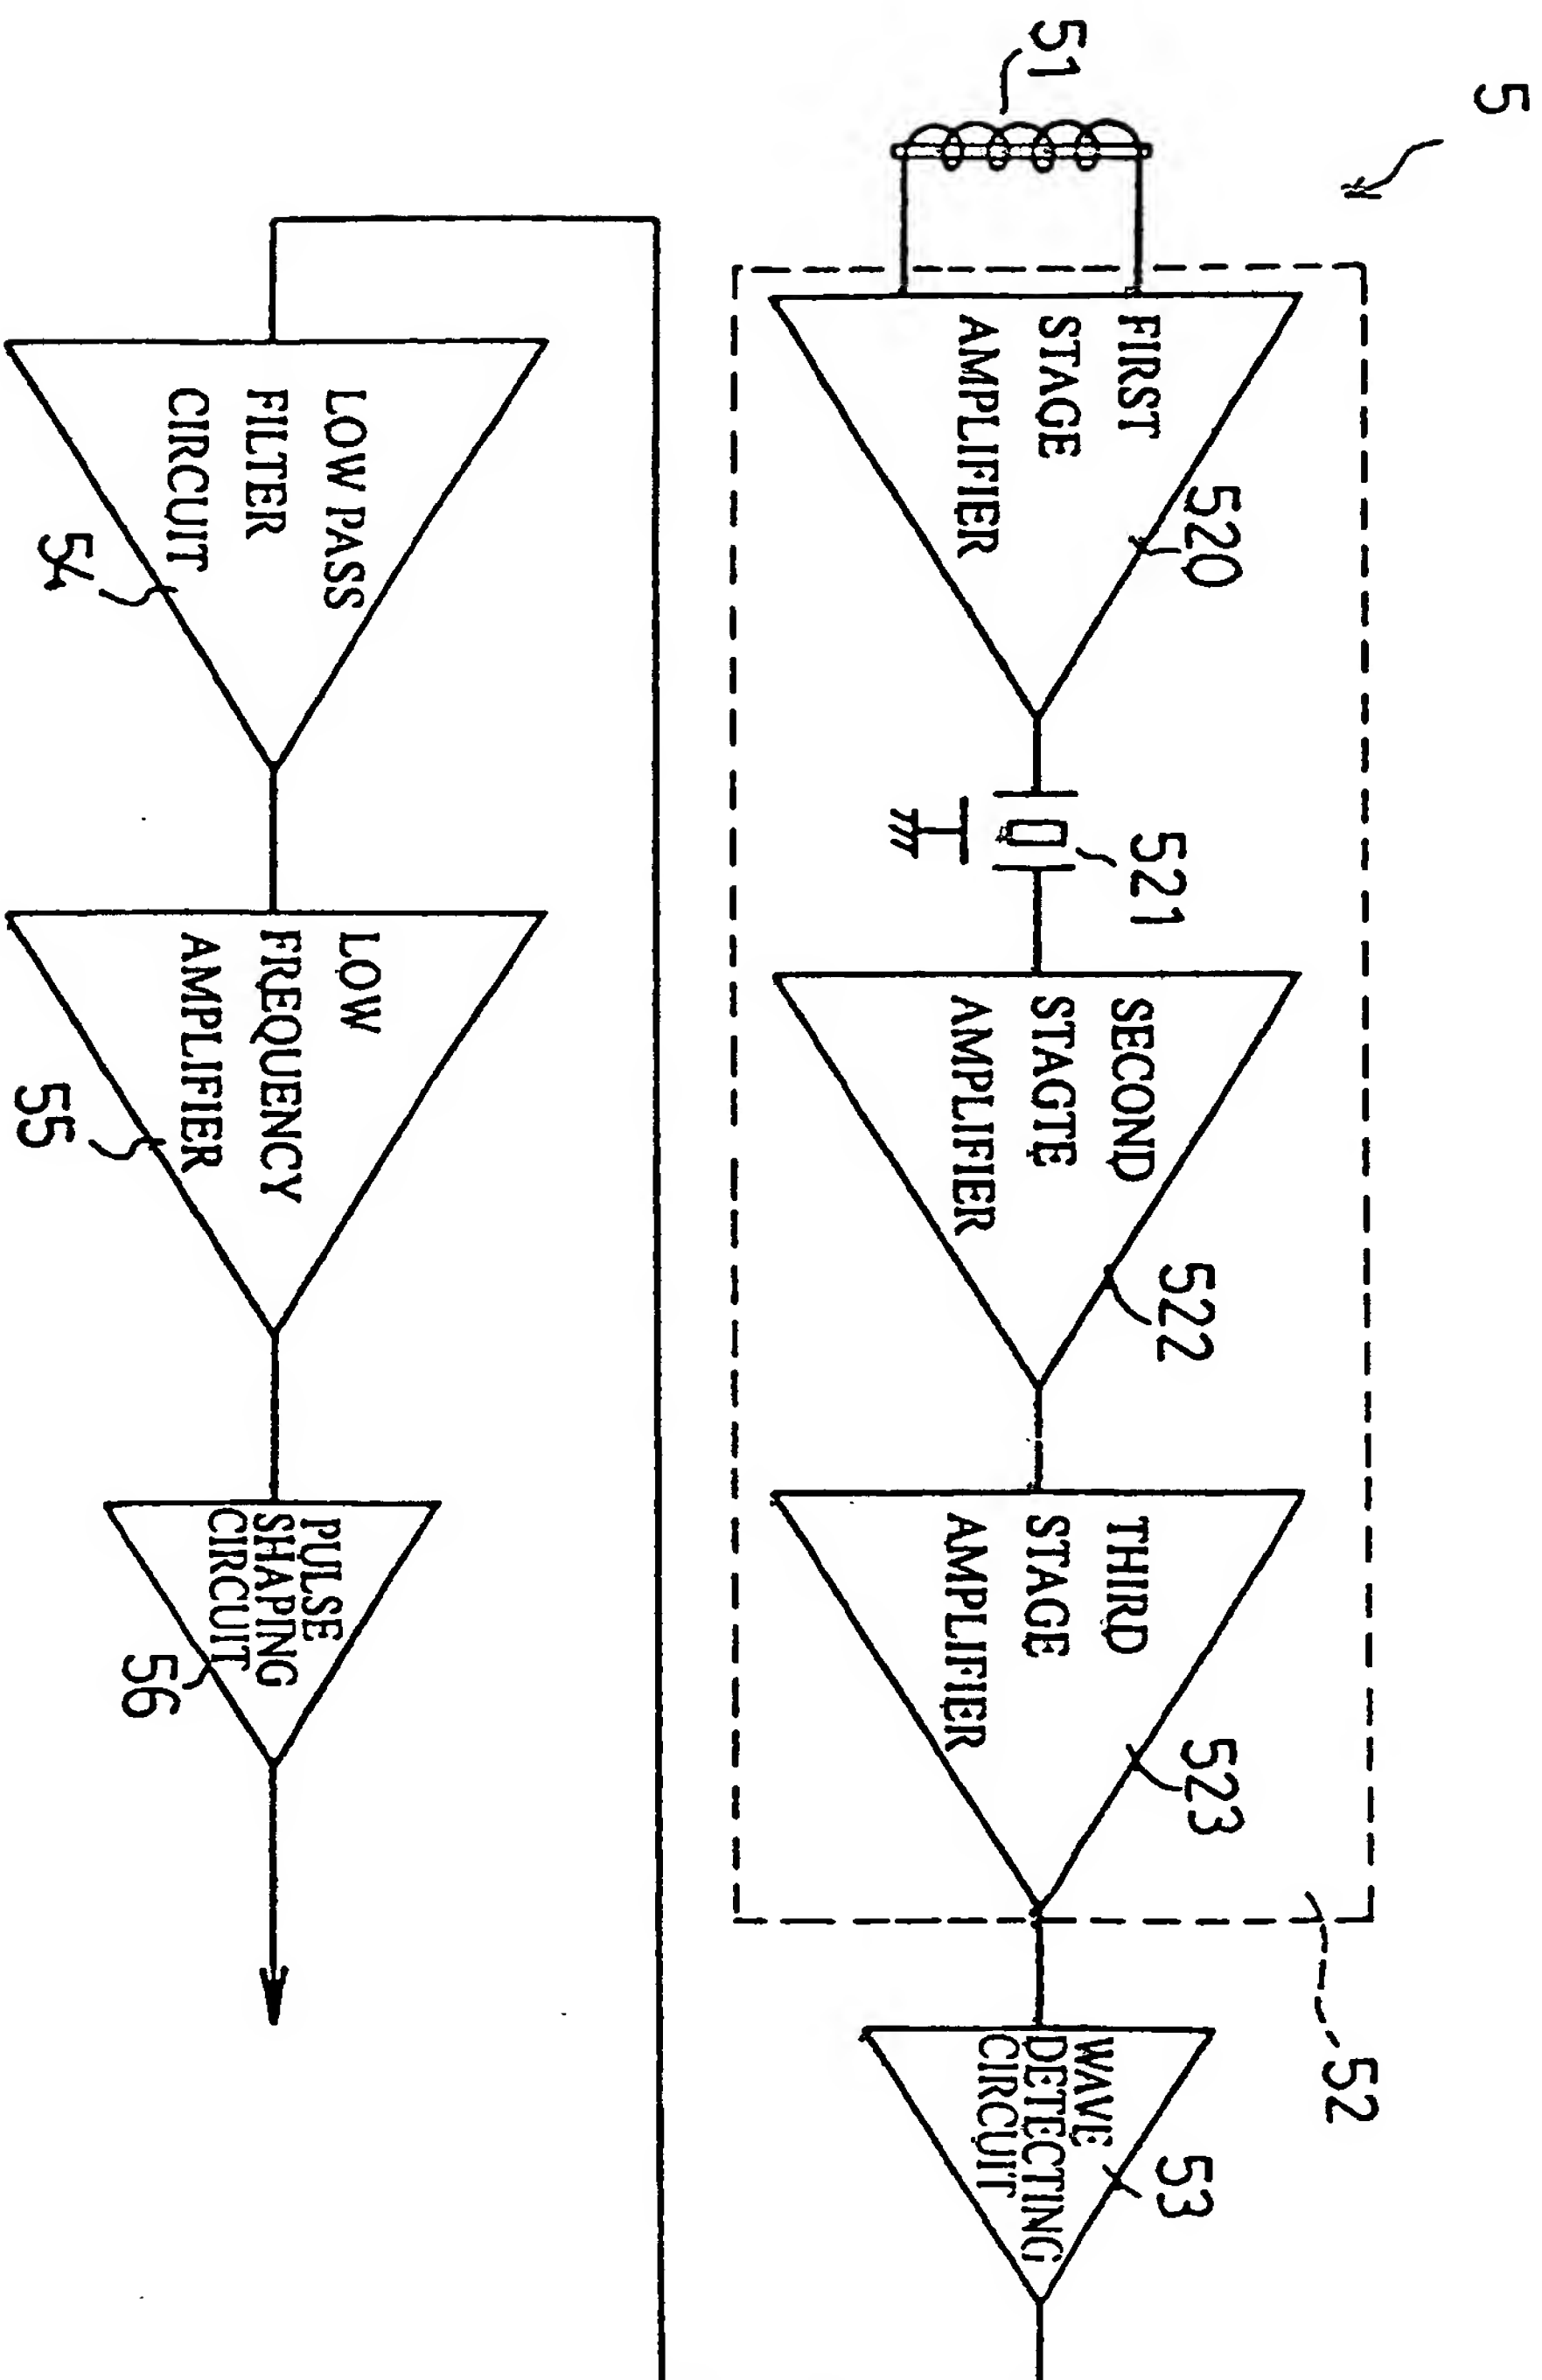


FIG.7

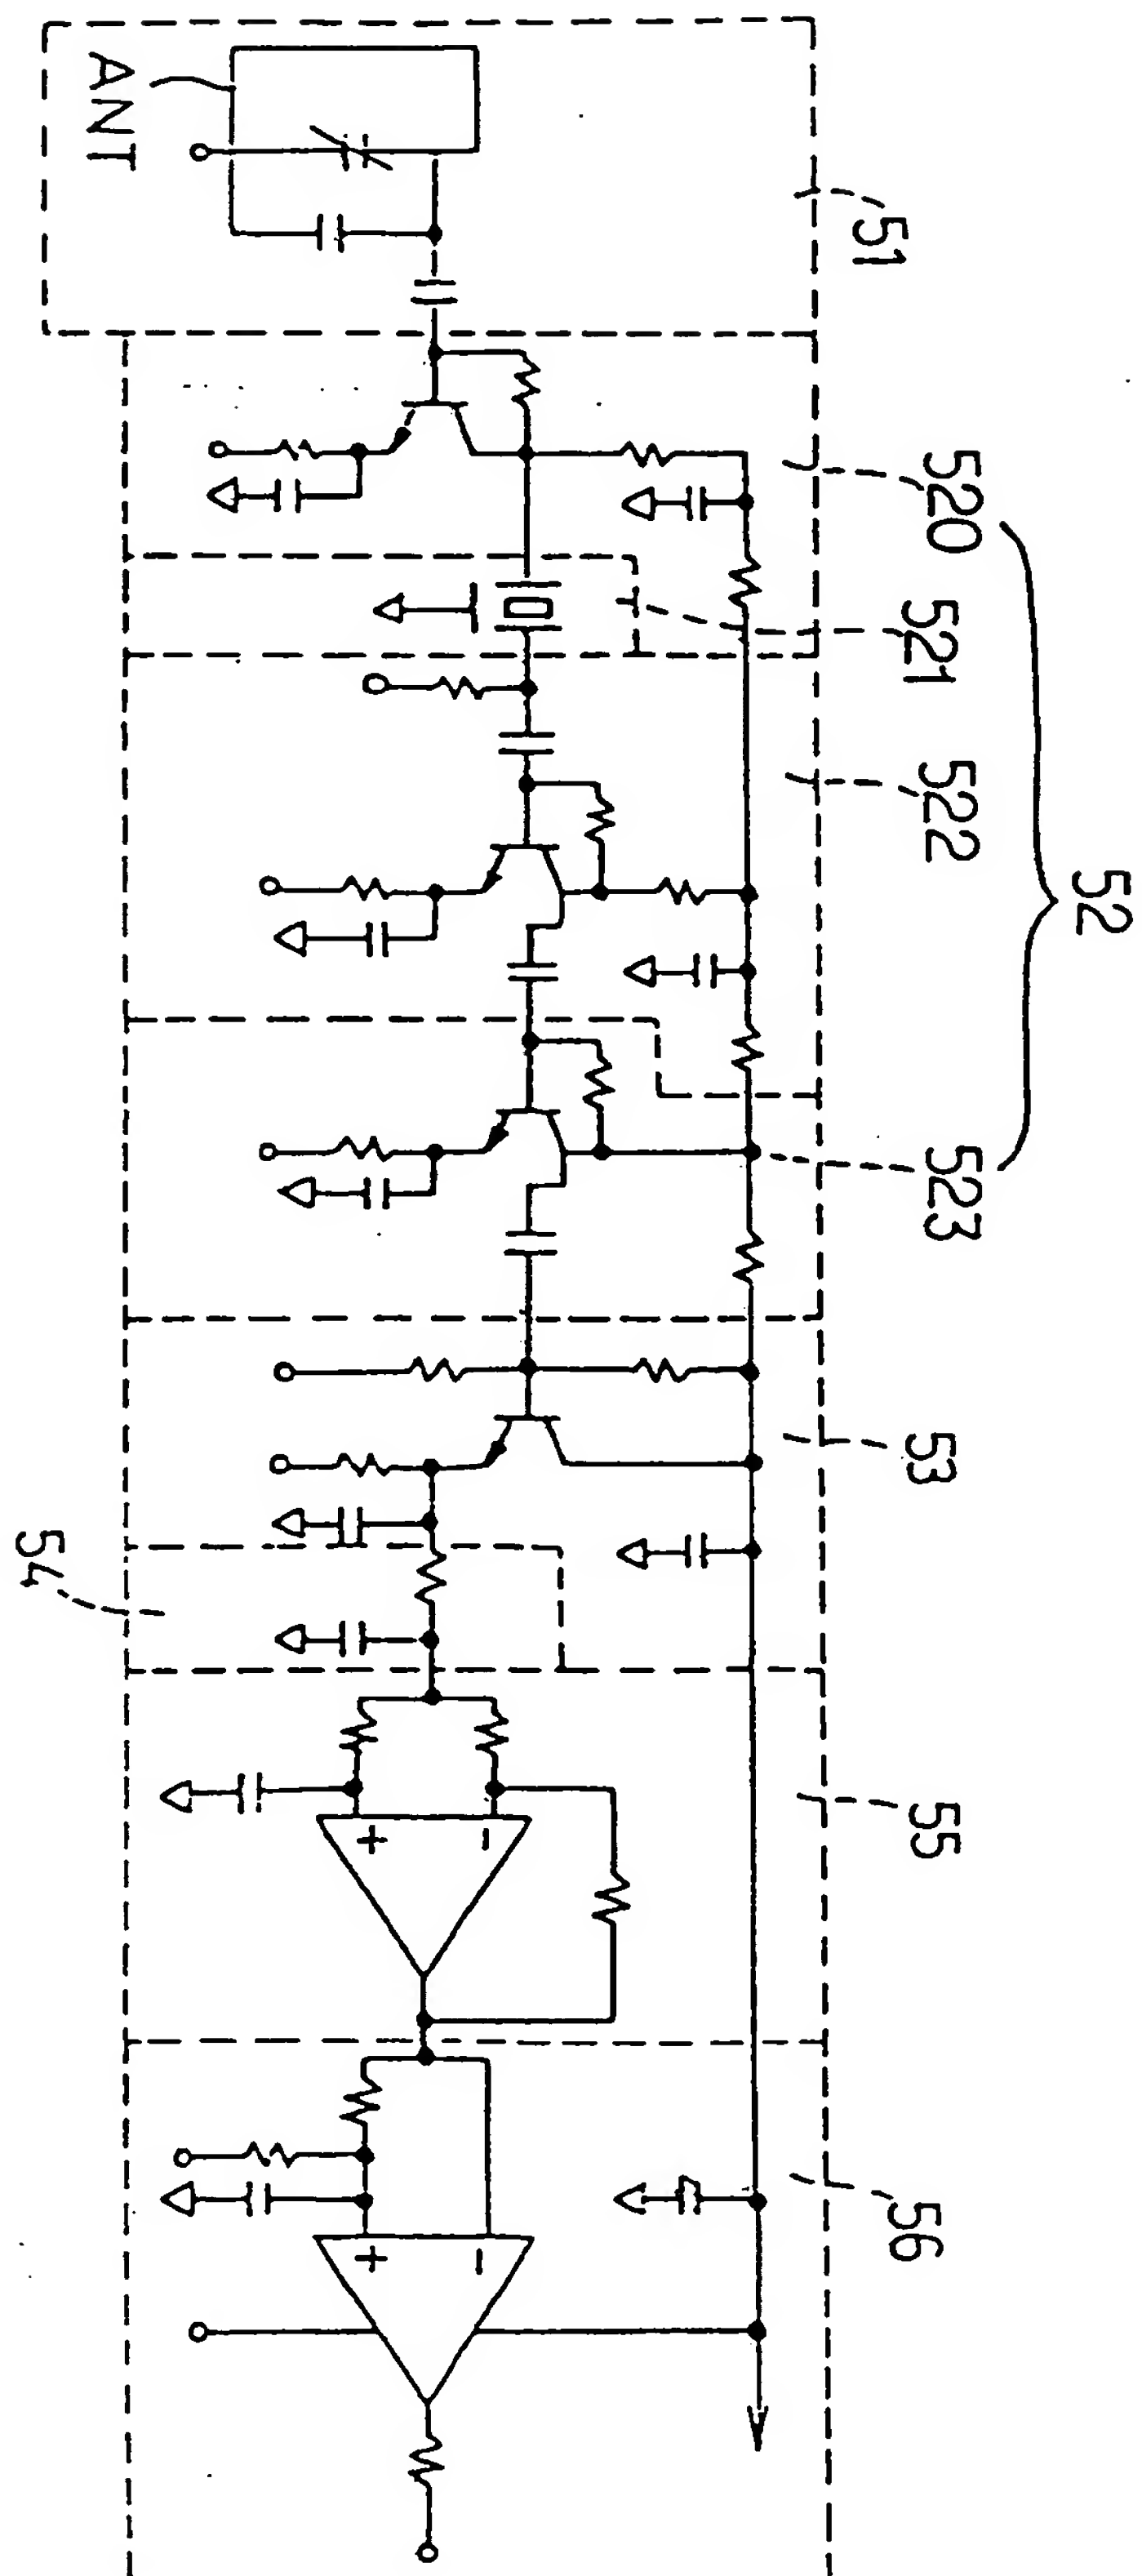


FIG. 8

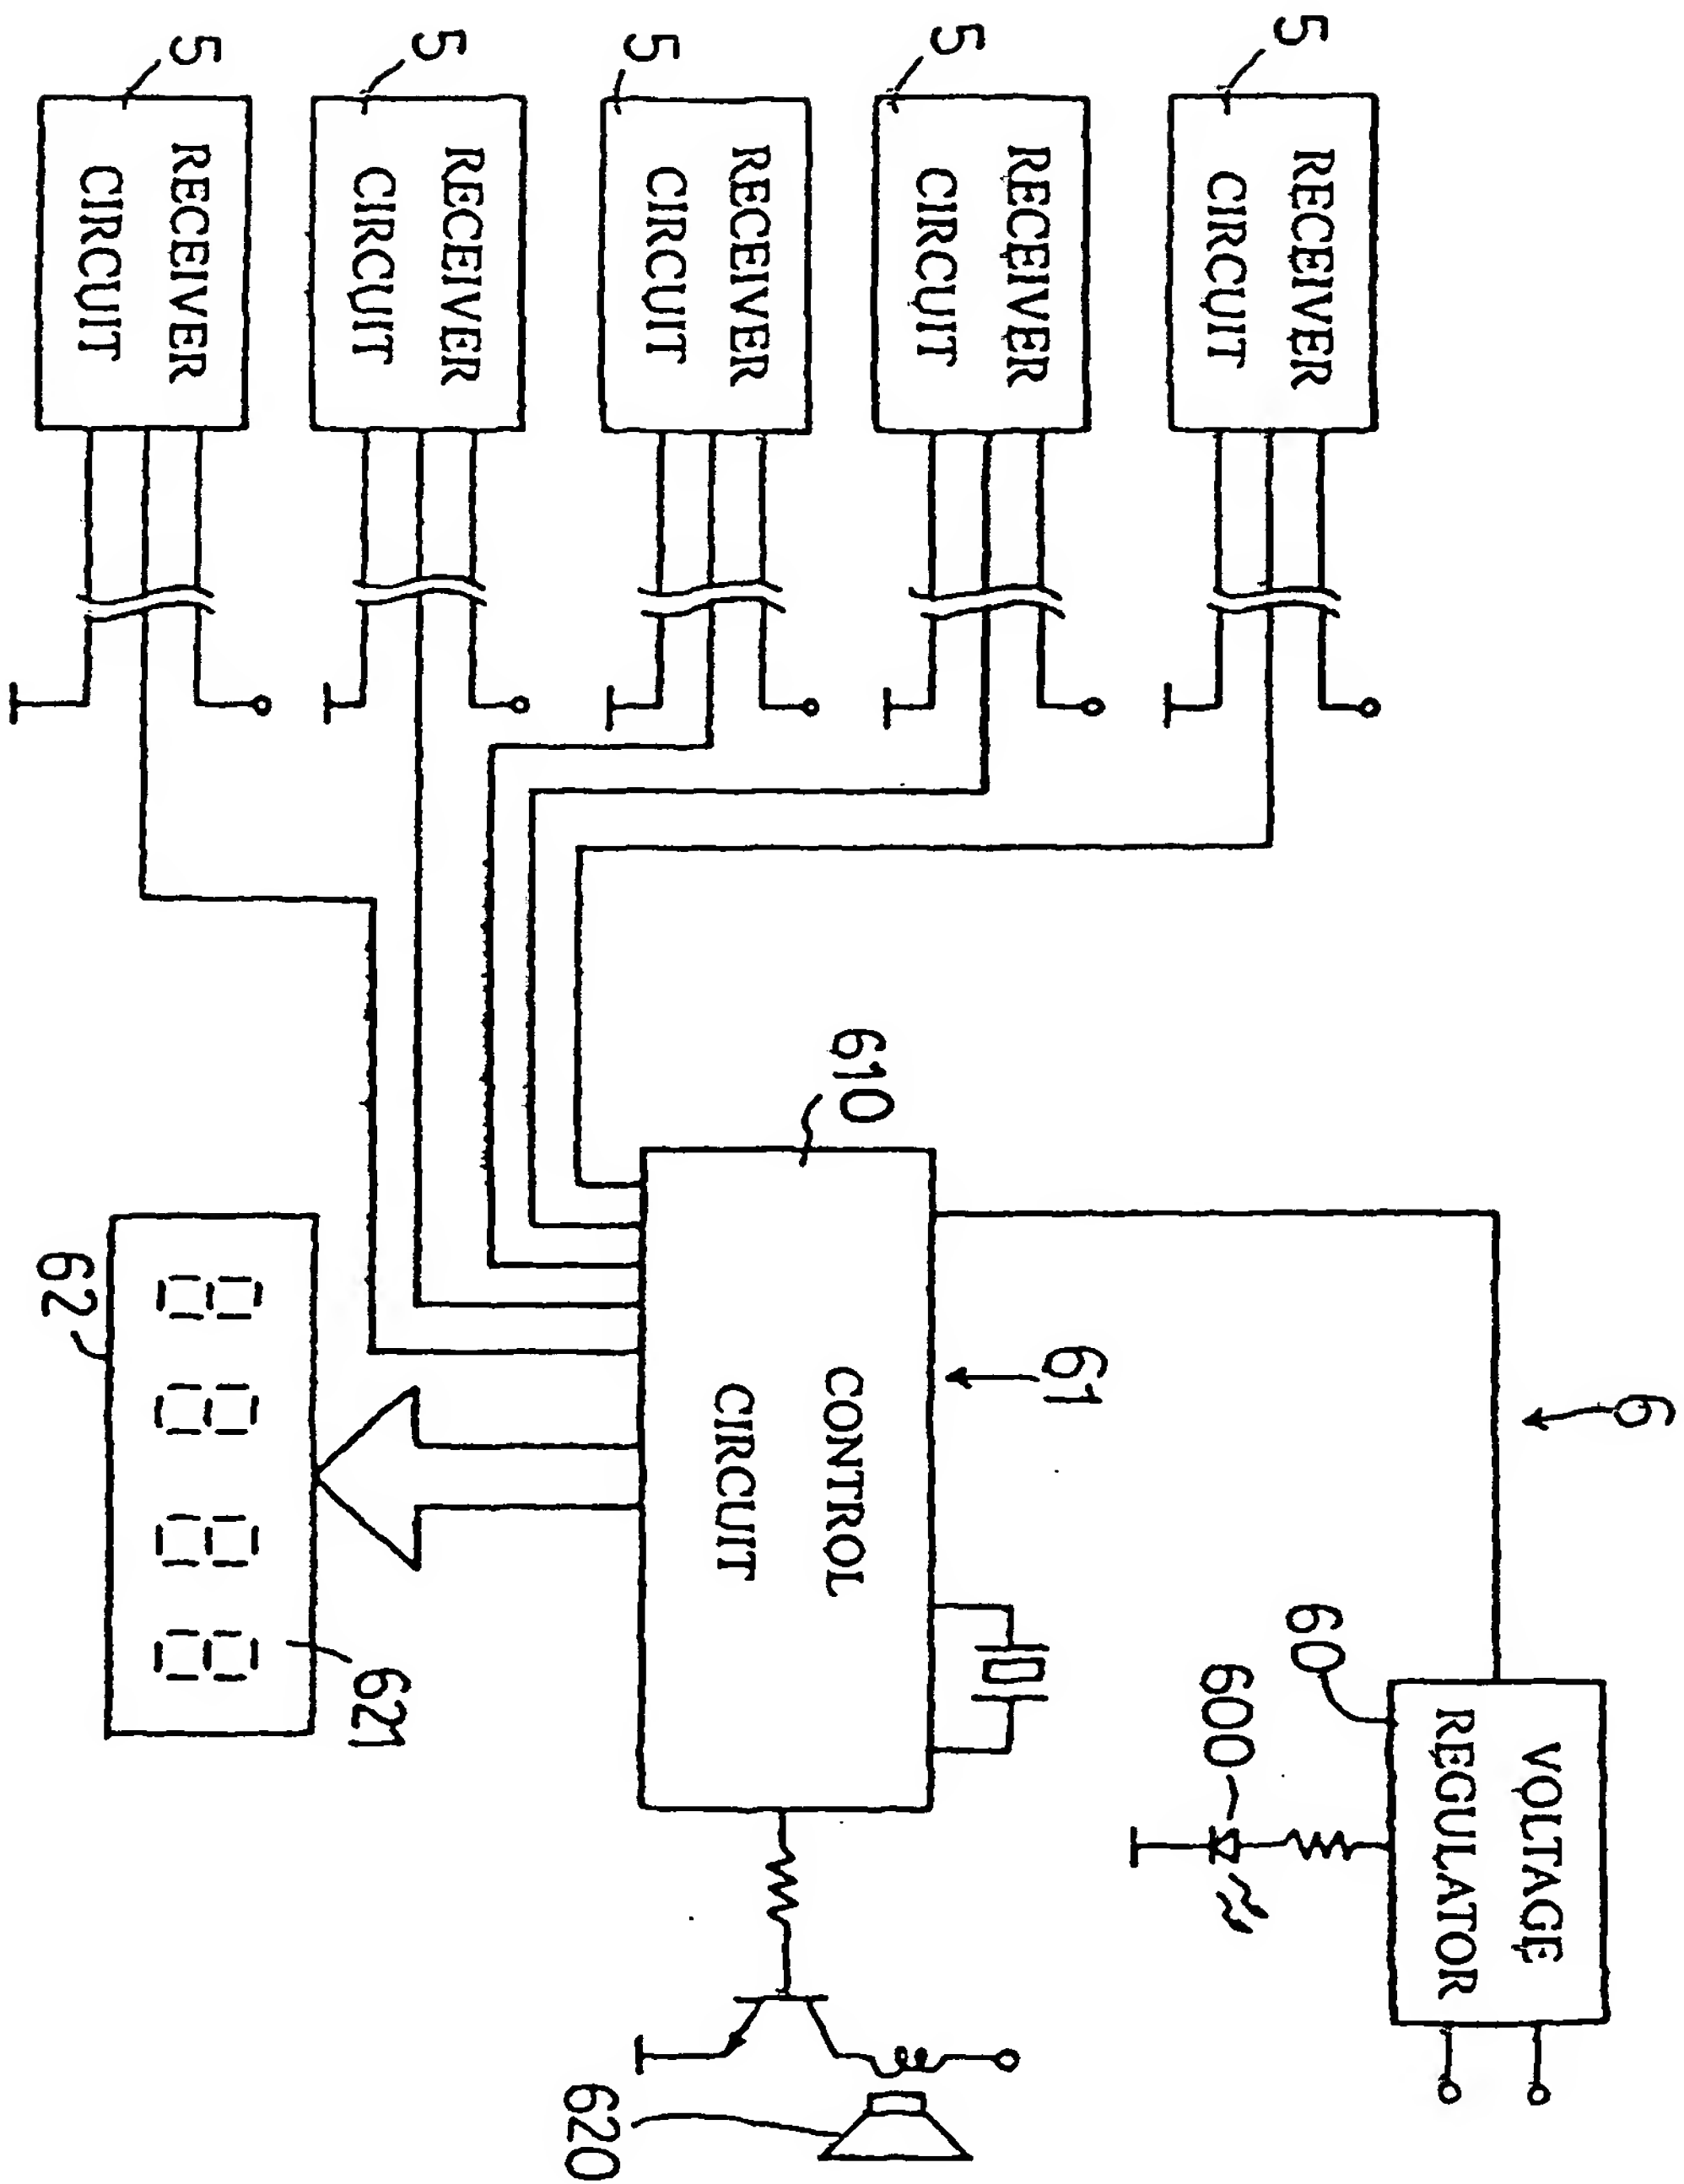


FIG. 9

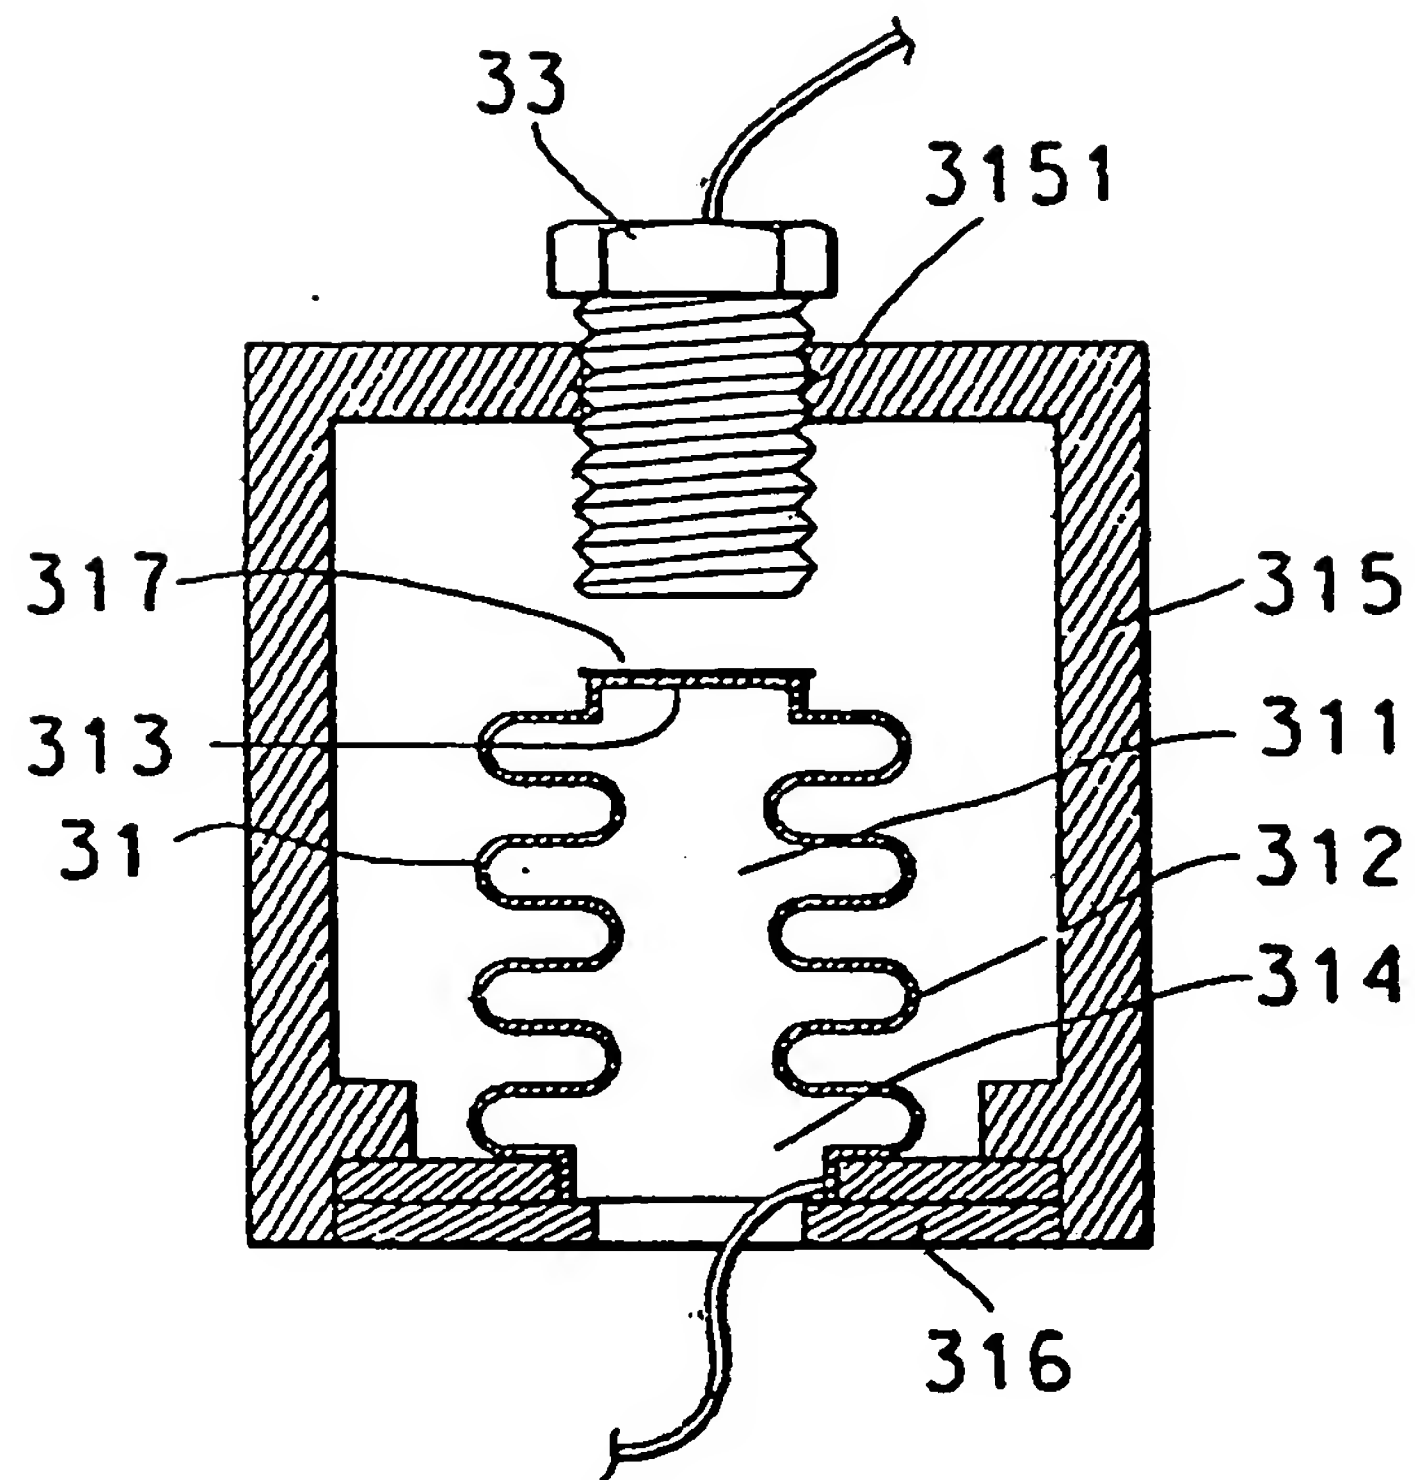


FIG. 10

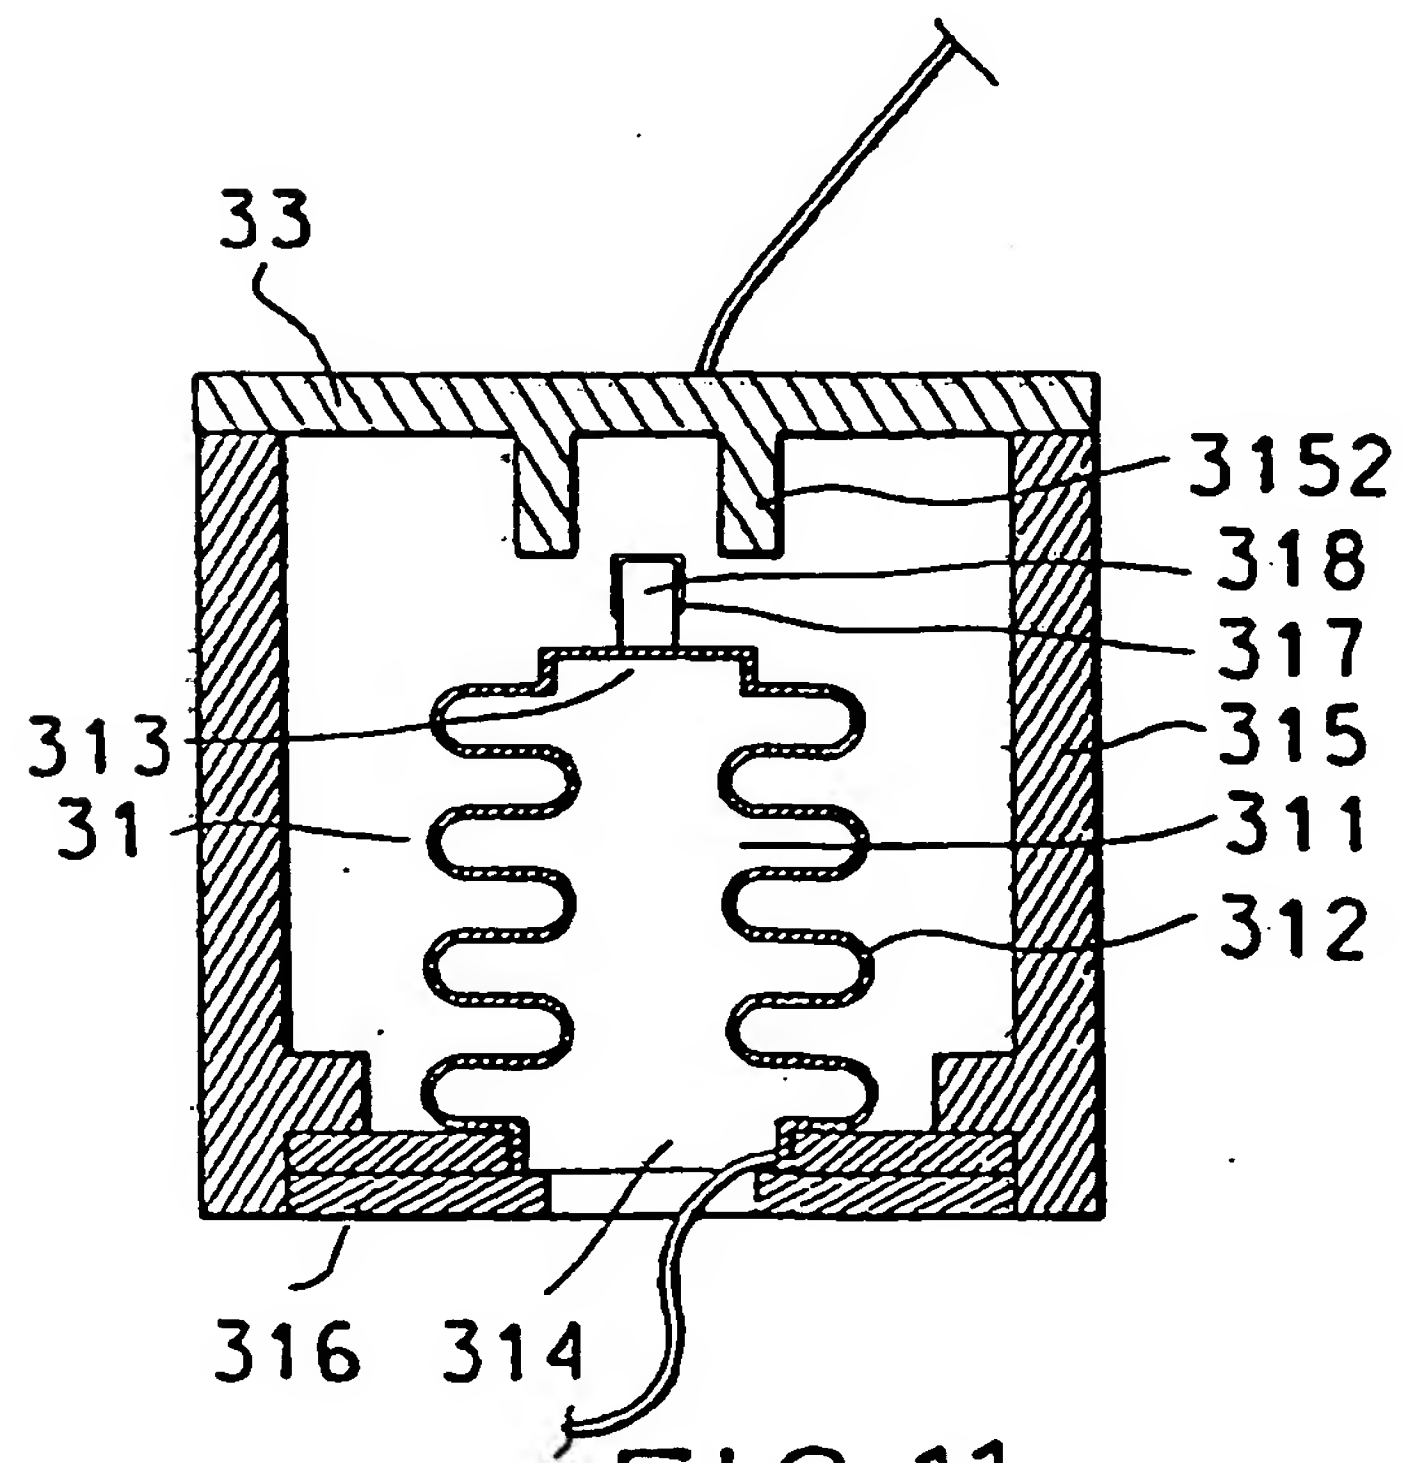


FIG. 11

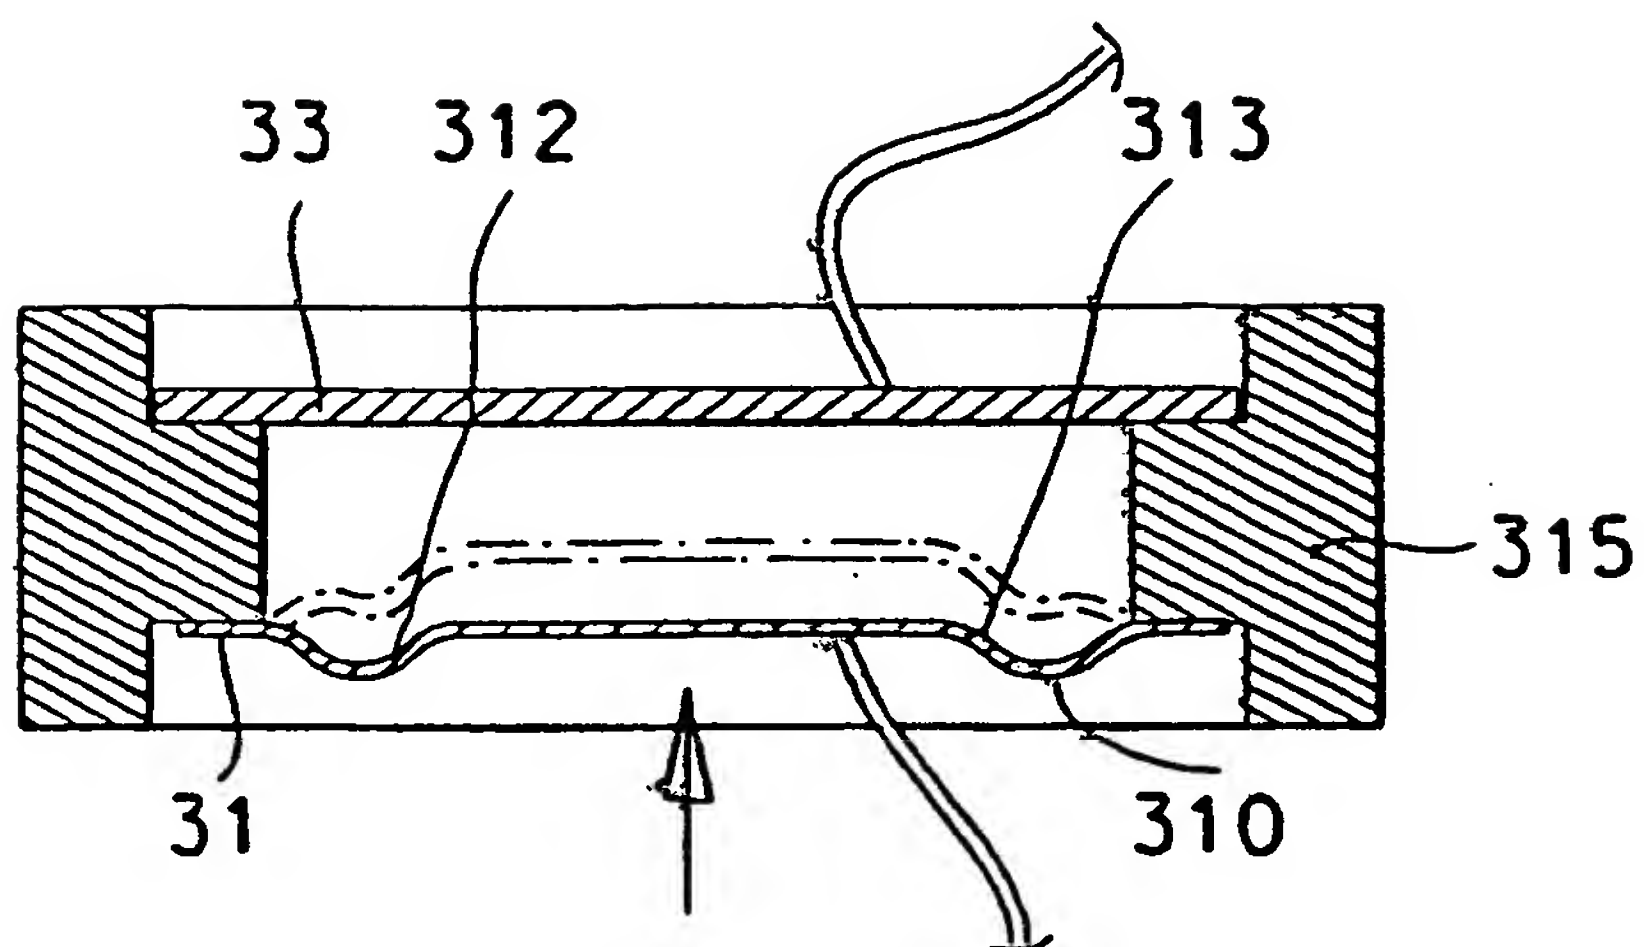


FIG.12

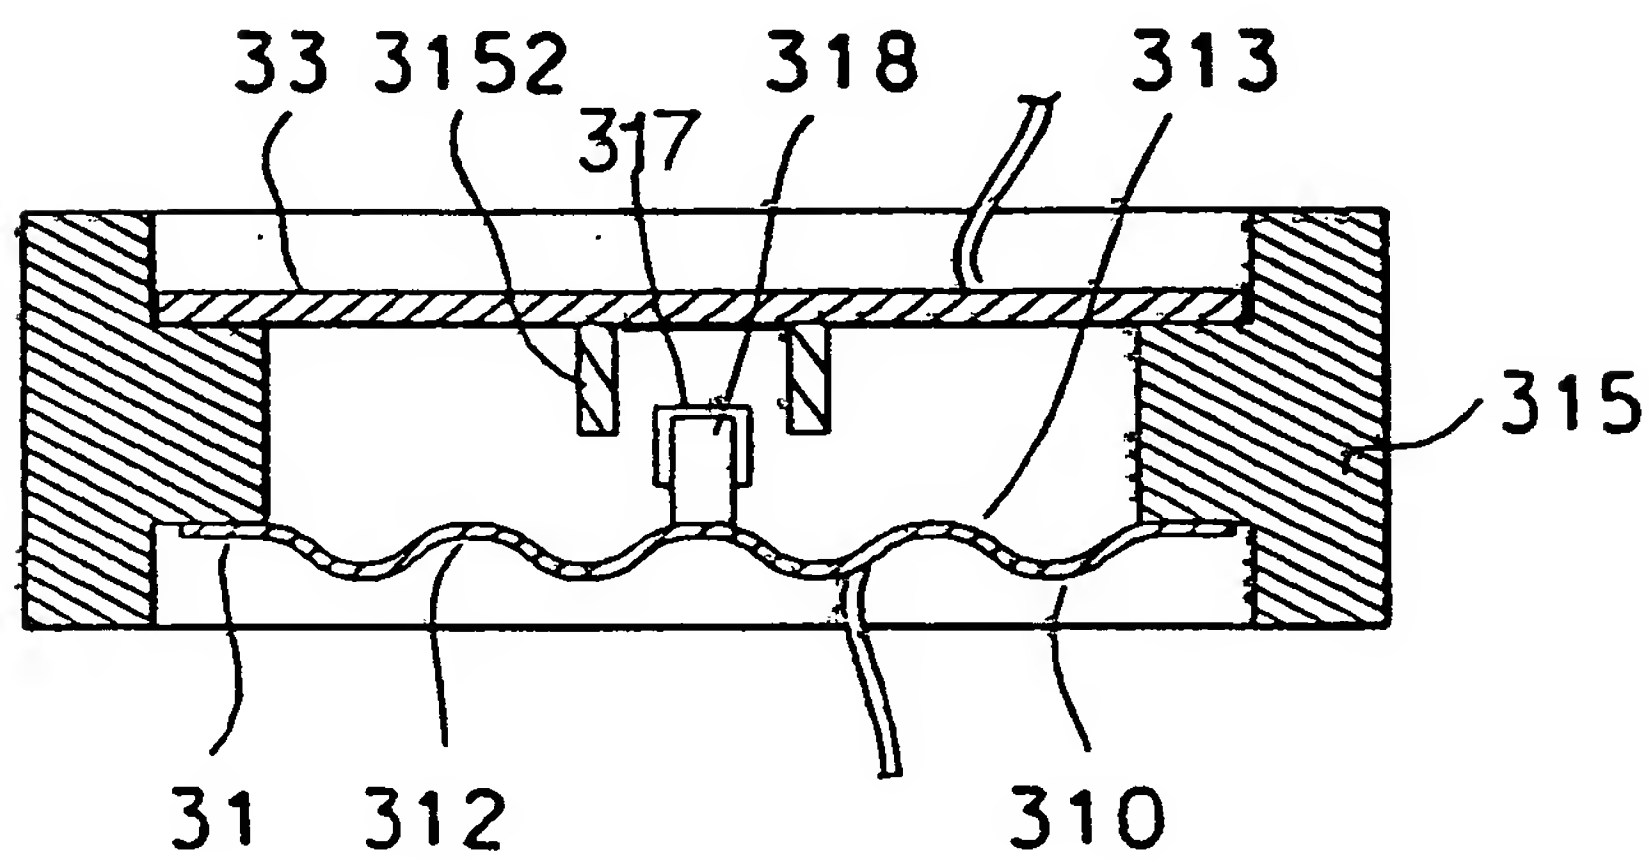


FIG.13

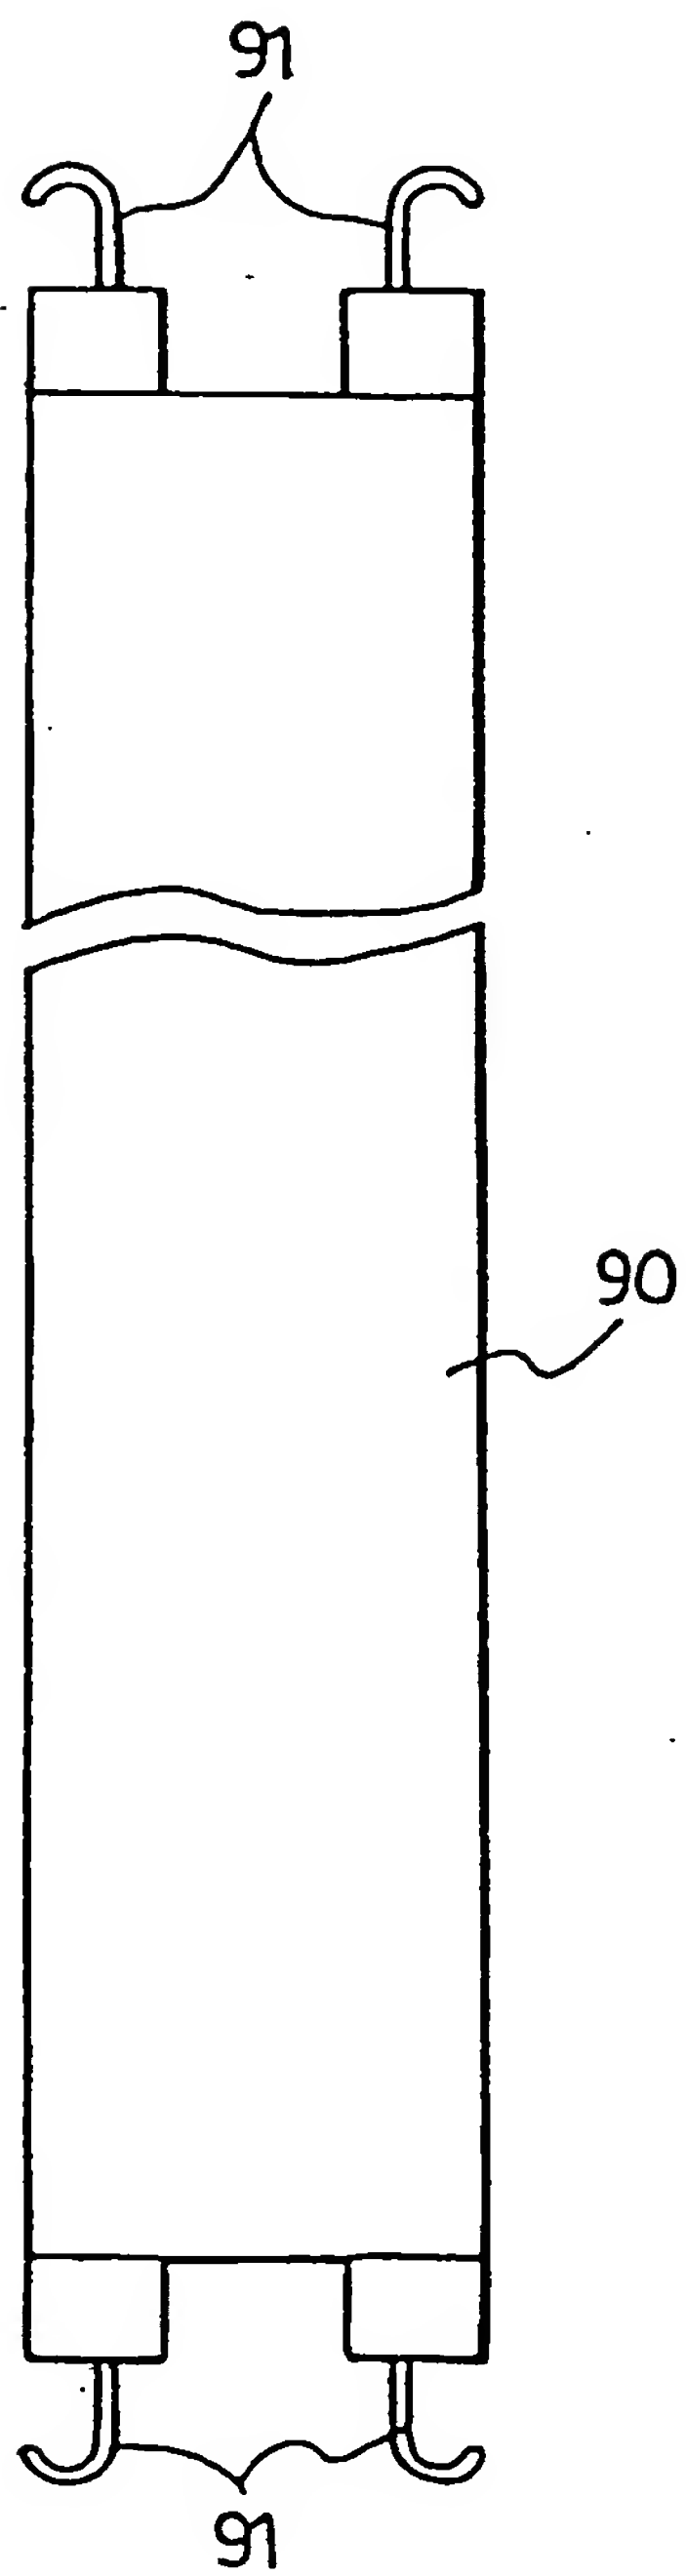


FIG.14

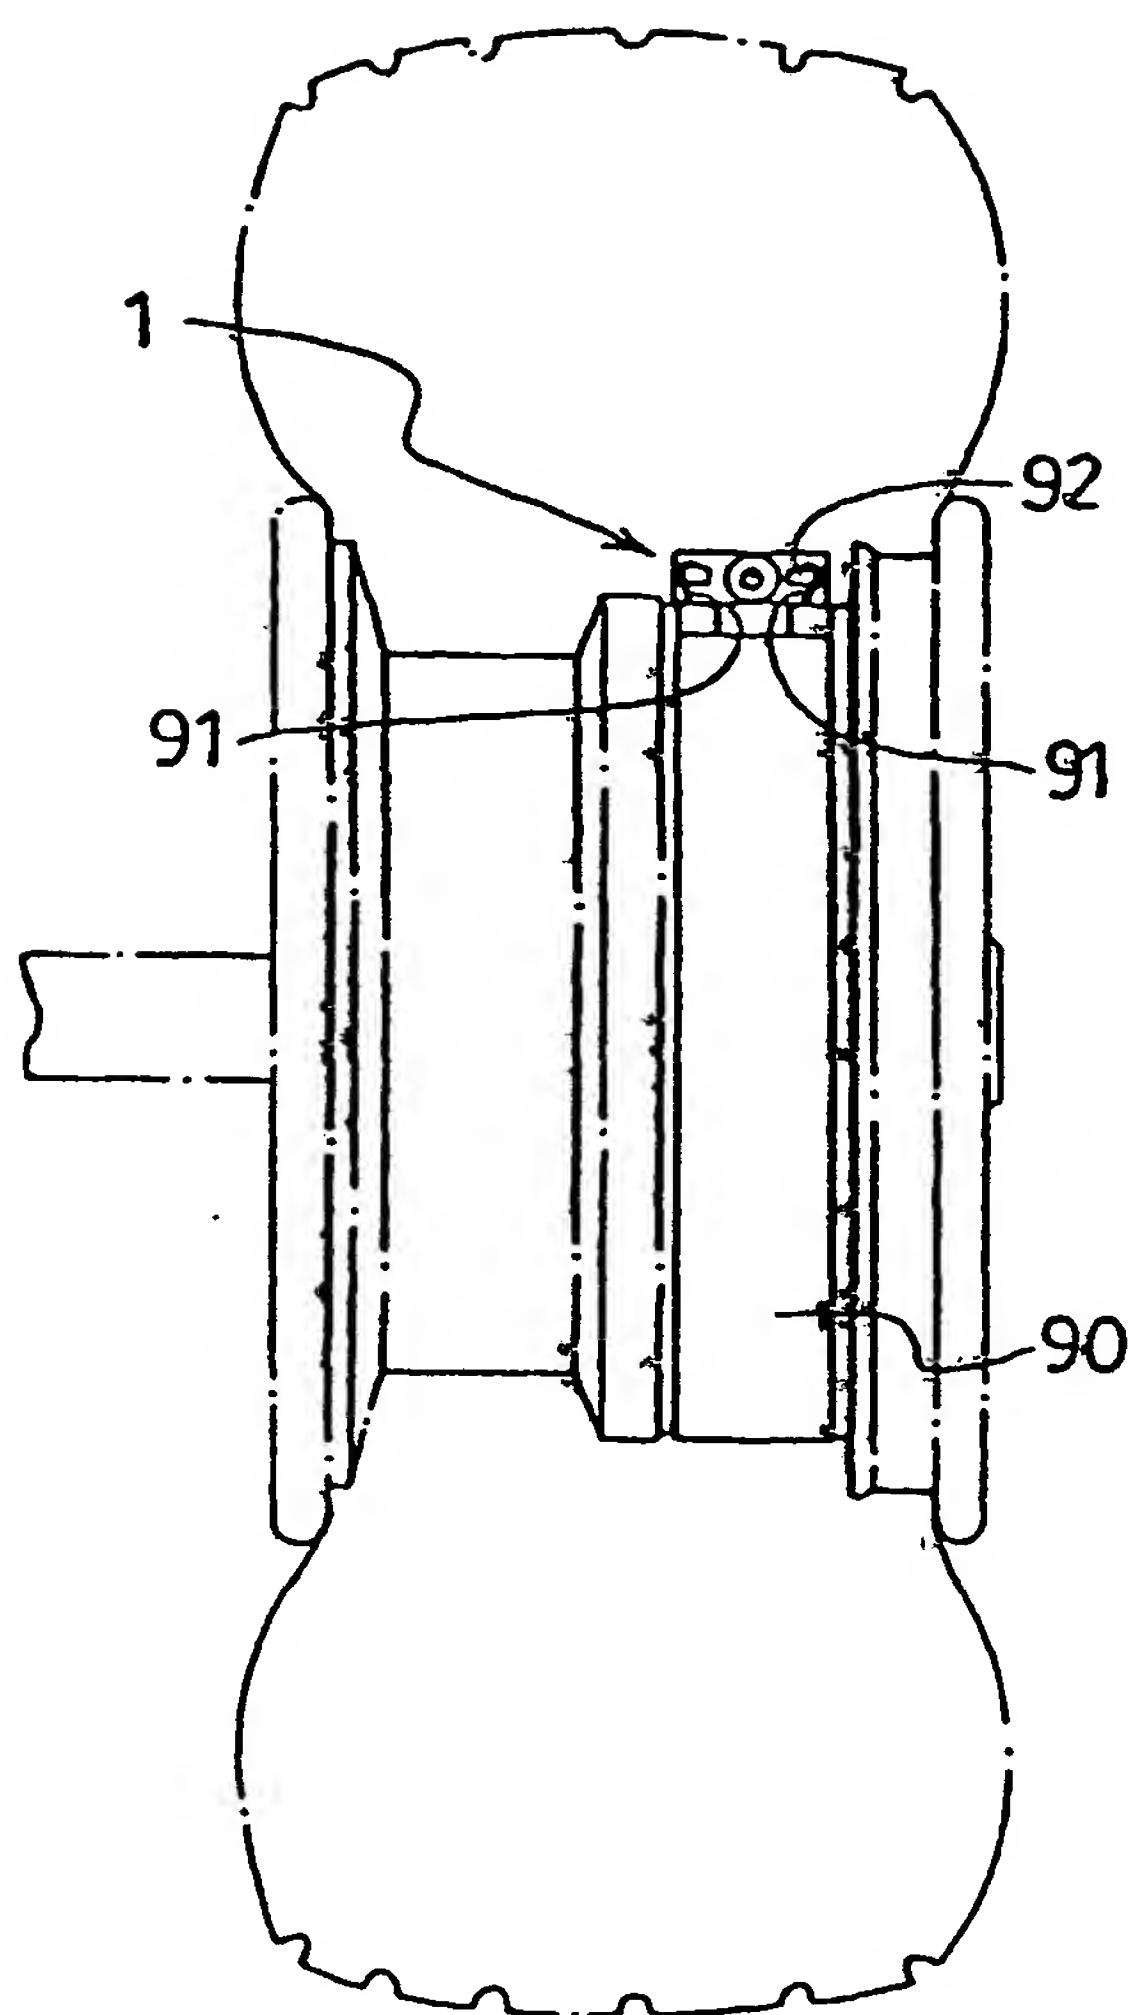


FIG.15

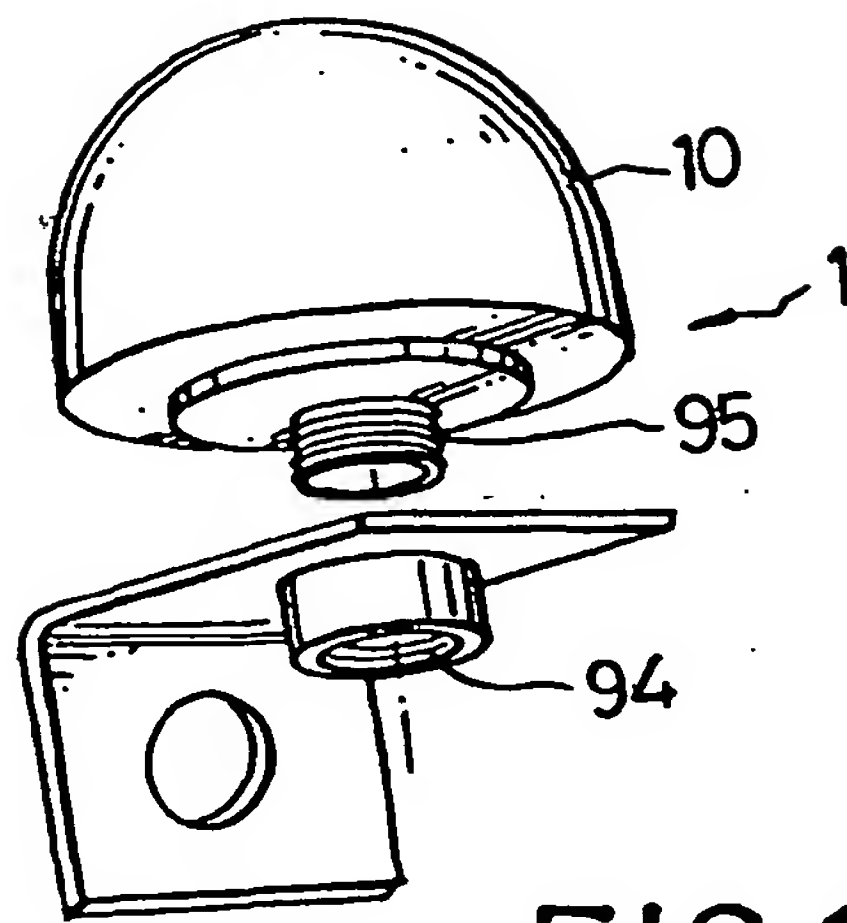


FIG.16

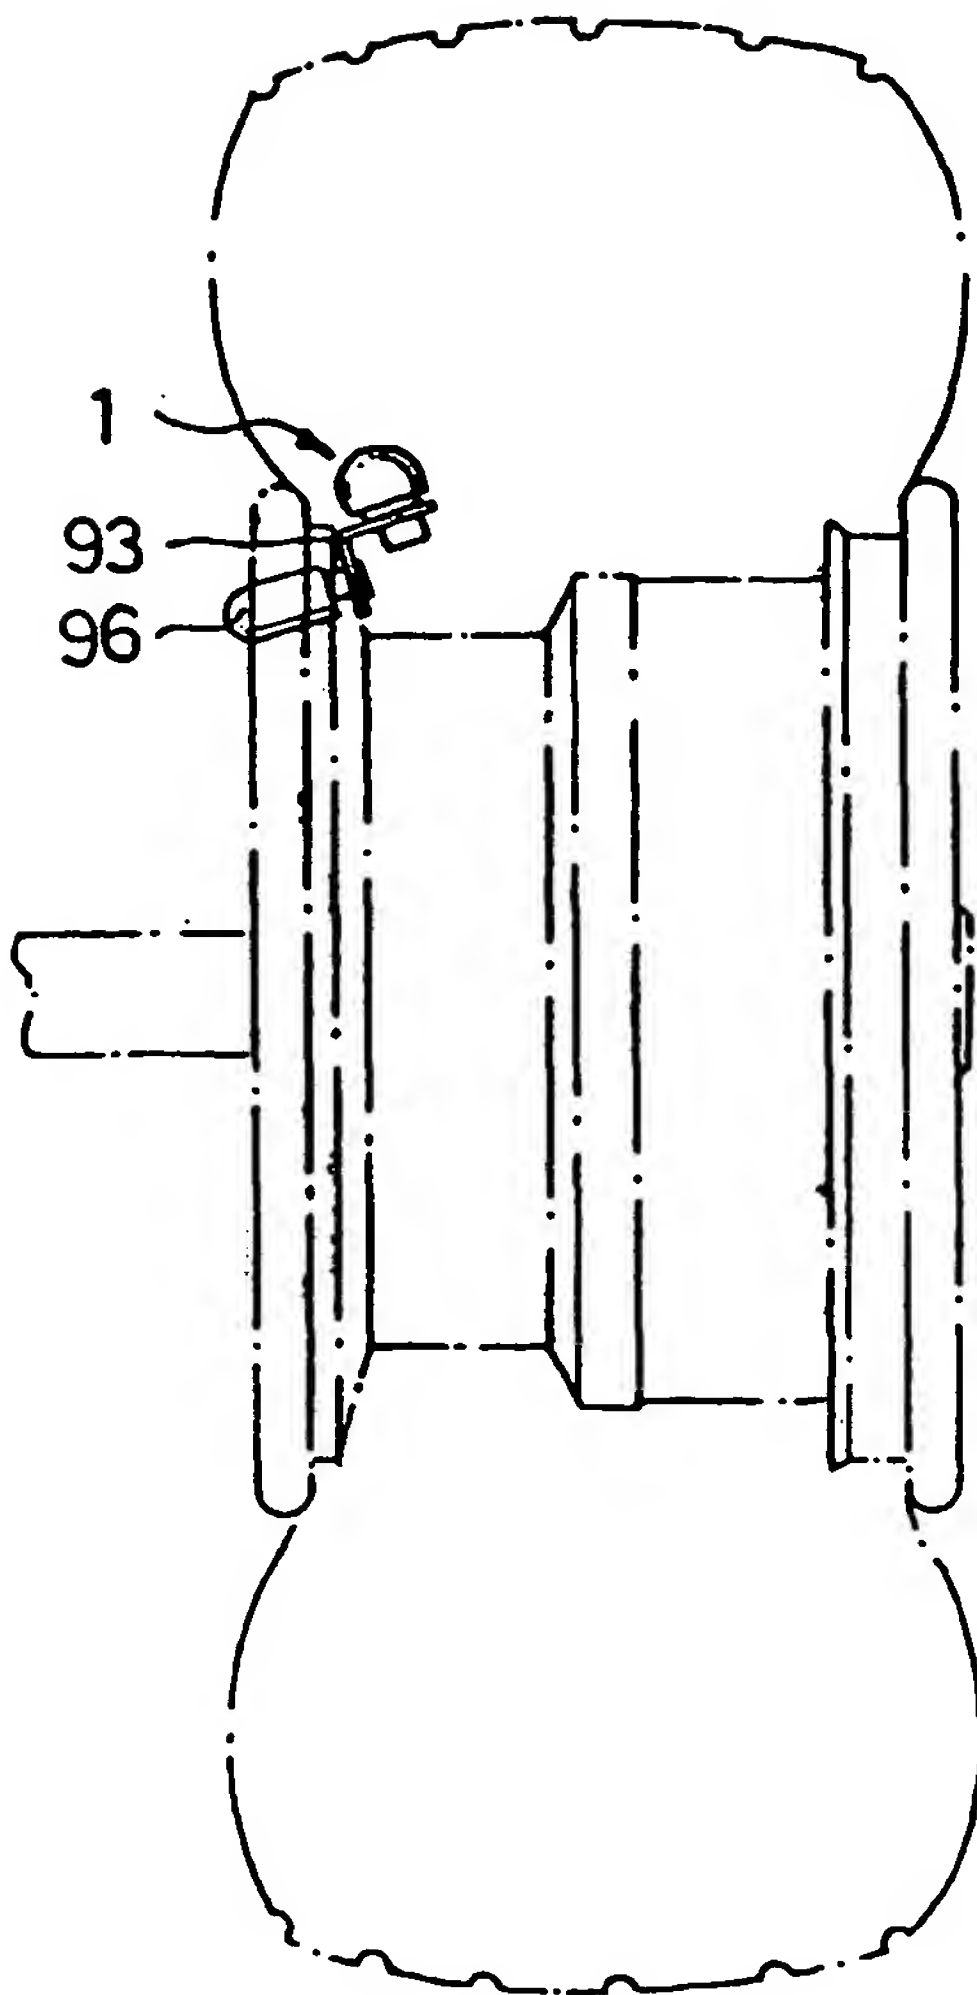


FIG.17



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 99 30 2585

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
Y	US 5 889 464 A (HUANG TIEN-TSAI) 30 March 1999 (1999-03-30) * abstract; figures 1-14 * * column 3, line 39 - column 8, line 5 *	1-10	G01L17/00 G01L9/12 B60C23/04
Y	PATENT ABSTRACTS OF JAPAN vol. 008, no. 060 (P-262), 22 March 1984 (1984-03-22) & JP 58 210534 A (CITIZEN TOKEI KK), 7 December 1983 (1983-12-07) * abstract; figures 1,2,4,6,7 *	1,3-8,10	
A		2,9	
Y	EP 0 213 727 A (GARRETT CORP) 11 March 1987 (1987-03-11) * abstract; figures 1-5 * * page 3, column 21 - column 29 * * page 5, line 13 - line 31 * * page 6, line 33 - page 7, line 27 * * page 13, line 32 - page 14, line 19 *	1,4-8,10	
A		2,3,9	
Y	PATENT ABSTRACTS OF JAPAN vol. 014, no. 104 (P-1013), 26 February 1990 (1990-02-26) & JP 01 307631 A (HITACHI LTD), 12 December 1989 (1989-12-12) * abstract; figures 1,8 *	2,3,9	TECHNICAL FIELDS SEARCHED (Int.Cl.7)
A		1,4-8,10	G01L B60C
A	DE 34 47 397 A (BOSCH GMBH ROBERT) 3 July 1986 (1986-07-03) * abstract * * page 5, line 21 - line 22 * * page 6, line 10 - line 17 * * page 10, line 15 - line 16 * * page 11, paragraph 2 - page 12, paragraph 2 *	1-10	
The present search report has been drawn up for all claims			
Place of search MUNICH		Date of completion of the search 27 August 1999	Examiner Helm, B
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons</p> <p>& : member of the same patent family, corresponding document</p>			

EPO FORM 1503 03.92 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 99 30 2585

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

27-08-1999

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5889464 A	30-03-1999	NONE	
JP 58210534 A	07-12-1983	NONE	
EP 0213727 A	11-03-1987	US 4763063 A	09-08-1988
		BR 8603458 A	04-03-1987
		JP 62063812 A	20-03-1987
JP 01307631 A	12-12-1989	NONE	
DE 3447397 A	03-07-1986	FR 2575289 A	27-06-1986
		IT 1186439 B	26-11-1987
		JP 61155931 A	15-07-1986

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

THIS PAGE BLANK (USPTO)